



DIY® EASY PRO®



JUST ASK
amazon alexa



works with the
Google Assistant

Includes 11.5 ft in
Pre-charged Quick-
Connect® Line Set *

SMART HVAC
CONTROLLER®



Professional Comfort. **DIY® Price Tag.**

SCAN HERE
for the most up-to-date
version of this brochure.



Eligible for
**MRCOOL®
CARE** PROGRAM

**CHARGED WITH
R-454B
REFRIGERANT**

COMFORT That Fits Your Budget.

OPERATES FROM
-13°F – 122°F
AMBIENT TEMPERATURES



No specialized tools. No complicated setup. Just reliable comfort, on your terms.

The **MRCOOL® DIY® Easy Pro®** mini-split heat pump was built for homeowners who want reliable heating and cooling without the cost of professional installation.

By combining proven MRCOOL® technology with simplified features, the DIY® Easy Pro® delivers dependable performance at a price that makes ductless comfort more accessible than ever.

Whether you're upgrading a bedroom, garage, home office, or rental property, the DIY® Easy Pro makes it possible to take control of your comfort — *and your budget.*



ENERGY SAVINGS

Variable speed technology
Energy Star® certified models



EASY MAINTENANCE & INSTALLATION

Washable filters
No major renovations, patching or painting required



COMFORT IN ANY CLIMATE

Operate in temperatures as low as -13°F and as high as 122°F

EVERYDAY PERFORMANCE THAT SAVES YOU MONEY

- Inverter technology helps reduce energy use
- Efficient heating and cooling year-round
- Quiet operation for living spaces
- R-454B future-ready refrigerant

CONTROL FROM ANYWHERE

Use the MRCOOL® Comfort App to:

- Adjust temperature
- Change modes
- Create schedules
- Monitor performance



YOU DON'T HAVE TO SACRIFICE
PERFORMANCE
FOR A **GREAT PRICE.**



Everything You Need for Reliable Comfort.

TRUE DIY Installation Starts with the Pre-Charged DIY® Line Set.



MRCOOL® pre-charged DIY® Quick Connect® line sets eliminate specialized tools, refrigerant handling, and professional installation barriers.

- **PRE-CHARGED CONVENIENCE:** Factory-sealed refrigerant eliminates the need for manual charging.
- **QUICK CONNECT® TECHNOLOGY:** Tool-free connections ensure a secure, leak-proof seal.
- **NO SPECIALIZED EQUIPMENT:** Install without vacuum pumps, manifold gauges, or complex gear.
- **INDEPENDENT INSTALLATION:** No HVAC license or refrigerant handling required for setup.


DO YOU NEED EXTRA LINE SET?

MRCOOL® DIY® systems arrive ready to connect, eliminating vacuuming, specialized tools, and the need to handle refrigerant—making true DIY installation possible. Combine two standard line sets with our Quick Connect® Coupler for custom-length installations.

CHOOSE THE RIGHT
SIZE FOR YOUR SPACE
9K | 12K | 18K | 24K

UP TO
20.2
SEER2

UP TO
9.3
HSPF2-4

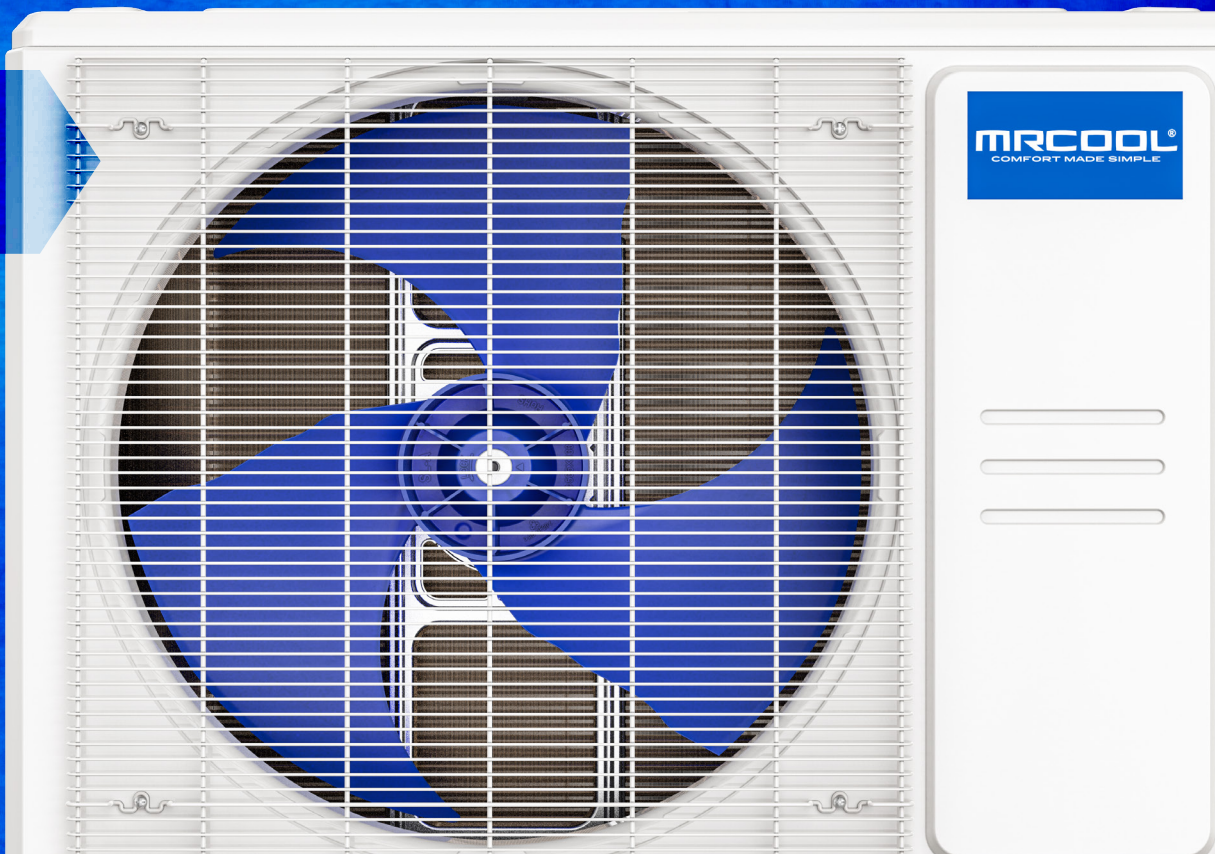



Timer



Leakage Detection



Follow Me®



Gold Fin® Condenser



Smartphone App

LOW 5°F

Low Temp Cooling*



Quiet Running



DC Inverter

MODEL NO.		Indoor Unit	EZPRO-09-HP-WMAH-115DE-0	EZPRO-12-HP-WMAH-115DE-0	EZPRO-18-HP-WMAH-230DE-0	EZPRO-24-HP-WMAH-230DE-0
		Outdoor Unit	EZPRO-09-HP-C-11511DE-0	EZPRO-12-HP-C-11511DE-0	EZPRO-18-HP-C-23011DE-0	EZPRO-24-HP-C-23011DE-0
CAPACITY & PERFORMANCE						
Cooling Capacity		Btu/h	9000	12000	17000	24000
SEER2		Btu/W	20.2	19.5	20.0	18.9
EER2		Btu/W	11.3	9	9.8	9.7
Heating Capacity		Btu/h	10000	12000	18000	25000
HSPF2-4		Btu/W	9.2	9.3	8.5	8.7
HSPF2-5		Btu/W	7.1	7	6.6	6.9
Max Coverage Area*		Sq Ft	Up to 400	Up to 550	Up to 800	Up to 1050
Indoor noise level (Turbo/Hi/Mi/Lo/Si))		dB(A)	43/35/31/22/18	44.5/40/35/25.5/17.5	46.5/43/36.5/30/18.5	51.5/45.5/40.5/26.5/21.5
Outdoor noise level		dB(A)	54	54	55	61
*Max Coverage Area is determined using ideal installation conditions.						
ELECTRICAL PARTS						
Power Supply		Ph-V-Hz	115V,1Ph,60Hz	115V,1Ph,60Hz	208-230V,1Ph,60Hz	208-230V,1Ph,60Hz
Indoor Minimum Circuit Ampacity		A	3.0	3.0	3.0	3.0
Indoor Maximum Fuse (Breaker)*		A	15.0	15.0	15.0	15.0
Outdoor Minimum Circuit Ampacity		A	17.0	19.5	15.0	19.0
Outdoor Maximum Fuse (Breaker)*		A	20.0	20.0	20.0	20.0
DIMENSIONS & WEIGHT						
Net Dimension (WxDxH)	Indoor	inch	28.70 x 7.87 x 11.50	31.57 x 7.87 x 11.61	38.23 x 8.98 x 12.64	42.60 x 9.21 x 13.27
	Outdoor	inch	28.35 x 10.63 x 19.49	28.35 x 10.63 x 19.49	30.12 x 11.93 x 21.85	35.04 x 13.46 x 26.50
Packing Dimension (WxDxH)	Indoor	inch	32.68 x 16.14 x 13.58	36.02 x 17.95 x 14.17	41.14 x 12.01 x 15.94	46.73 x 17.67 x 14.09
	Outdoor	inch	32.87 x 10.63 x 21.26	32.87 x 10.63 x 21.26	34.92 x 13.27 x 24.02	39.17 x 15.67 x 29.13
Net / Gross Weight	Indoor	lbs	23.81 / 33.95	24.91 / 35.71	30.64 / 44.97	35.49 / 49.60
	Outdoor	lbs	54.67 / 66.58	54.89 / 67.24	62.61 / 82.23	95.90 / 117.73
REFRIGERANT & PIPING						
Refrigerant Type (R-454B)		oz	17.28	21.52	34.92	50.44
Piping Size Liquid Side/Gas Side		inch	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	3/8" / 5/8"
REBATE SUMMARY						
NEEP			✓	✓	✓	✓
GHG					✓	✓
CEE Tier1 - North			✓	✓	✓	✓

All specifications are preliminary and are subject to change during mass production.