INSTALLATION INSTRUCTIONS



TKIT-1 & TKIT-2




READ ALL WIRE SIZING, VOLTAGE REQUIREMENTS AND SAFETY DATA TO AVOID PROPERTY DAMAGE AND

Inbuilt Thermostat for the KT, KTW, PAW, W and WHF model heaters

SPECIFICATIONS	Resistive Load		
Source 120 VAC	25 AMP	@ 3000W	
Source 208 VAC	25 AMP	@ 5200W	
Source 220 VAC	25 AMP	@ 5500W	
Source 240 VAC	25 AMP	@ 6000W	
Source 277 VAC	18 AMP	@ 4985W	
Temperature range	40°-90°F	(4°-32°C)	
Frequency	50-60 Hz		
Accuracy	7°F +/- 3.5°C		
Inductive Load	1/2HP		
Coan Action / Open On Town Disa / Dimetal Concer			

Snap Action / Open On Temp. Rise/ Bimetal Sensor





Approved for US & Canada


READ CAREFULLY - These instructions were written to help prevent difficulties that might arise during thermostat installation. Studying the instructions first may save considerable time and money later. Observing the following procedures will keep installation time to a minimum. Save these instructions for future use.


INSTRUCTIONS

WARNING: Turn oFf power at the breaker before installing.

- Mount Thermostat with provided screws.
- Wire the thermostat with RED thermostat wires to breaker, BLACK thermostat wires to heater, white neutral wires to heater.
- Install heater assembly into wall can.
- 4. Remove 1/2" knockout in grill.
- Mount grill with provided screws.
- Place plastic knob by pushing through grill opening.

WIRING DIAGRAMS

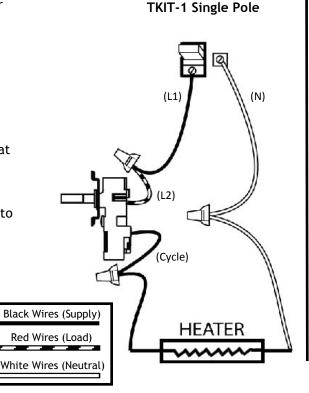

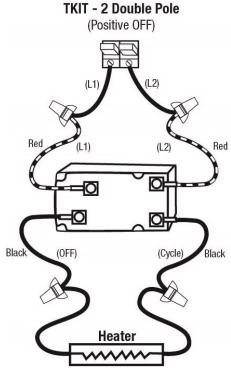

KING ELECTRIC MFG CO \cdot 9131 10TH AVENUE SOUTH \cdot SEATTLE, WA 98108 \cdot PH:206 762 0400 \cdot FAX: 206 763 7738 \cdot www.king-electric.com

Rev 10.6.16

INSTALLATION INSTRUCTIONS




TKIT-1 & TKIT-2



READ ALL WIRE SIZING, VOLTAGE REQUIREMENTS AND SAFETY DATA TO AVOID PROPERTY DAMAGE AND

Inbuilt Thermostat for the KT, KTW, PAW, W and WHF model heaters

SPECIFICATIONS	Resistive Load	
Source 120 VAC	25 AMP	@ 3000W
Source 208 VAC	25 AMP	@ 5200W
Source 220 VAC	25 AMP	@ 5500W
Source 240 VAC	25 AMP	@ 6000W
Source 277 VAC	18 AMP	@ 4985W
Temperature range	40°-90°F	(4°-32°C)
Frequency	50-60 Hz	
Accuracy	7°F +/- 3.5°C	
Inductive Load	1/2HP	








Approved for US & Canada


MOUNTING LOCATIONS

Use the two sheet metal screws provided to fasten the mounting bracket as shown above. Use the two machine screws to mount the thermostat to the mounting bracket.









KING ELECTRIC MFG CO · 9131 10TH AVENUE SOUTH · SEATTLE, WA 98108 · PH:206 762 0400 · FAX: 206 763 7738 · www.king-electric.com

Rev 10.6.16 2