


Cleaning Cooler and Rigid Media Pads

WARNING

- DISCONNECT ELECTRICAL POWER TO COOLER BEFORE REPLACING OR SERVICING THE MEDIA PADS.
 - MEDIA INSTALLATION MUST COMPLY WITH COOLER MANUFACTURER'S SPECIFICATIONS AND APPLICABLE ELECTRICAL AND BUILDING CODES
 - USE ONLY IN UPRIGHT POSITION.
-

The removable panel and media pad can be sprayed out on the ground to clean pad. Use light pressure when spraying pads. You can use a soft bristle brush to gently wipe away deposits. **NEVER spray pads with water while cooler is operating, and fan is running. This can cause damage to motor and will void the warranty.**

Removal of the Back Panel

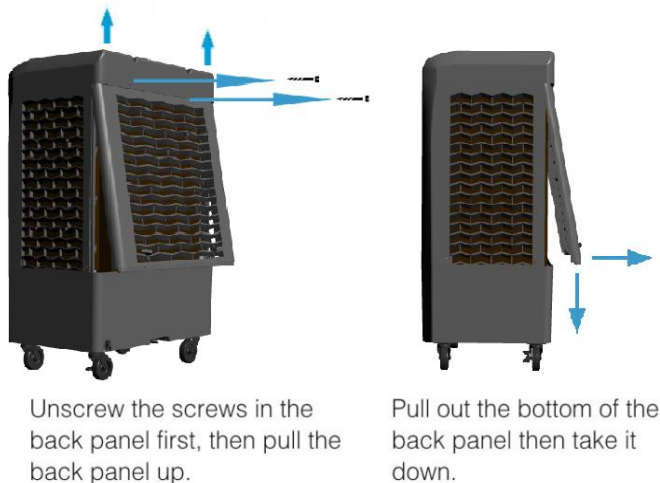

Removal and Replacement of Cooling Media

1. If your cooler includes media pins, remove by unscrewing/pulling out the disc.
2. Remove media pad. Replace with new pad.
3. Reinstall the back panel and you are ready to use the cooler again.

Go to www.hessaire.com for replacement videos and tips for eliminating any odor.