



T600

OPERATING
&
FILTER REPLACEMENT
DIRECTIONS

TO BEGIN USING YOUR **AIRPURA**

Inspect the exterior of your Airpura to verify there is no damage from shipping. If any damage is noted, please follow the instructions from the distributor returns policy.

Wipe the unit with a damp cloth to remove any dust from packaging


Plug the unit into a regular grounded 110 volt outlet

Turn on the unit to MAX and allow it to run for a few minutes

Set the variable speed control to the level you wish

The most efficient way to use your Airpura for regular air quality maintenance is to run it at a low speed **24 hours a day 7 days a week.**

Maintain a humidity level of below 40% at all times in your home.

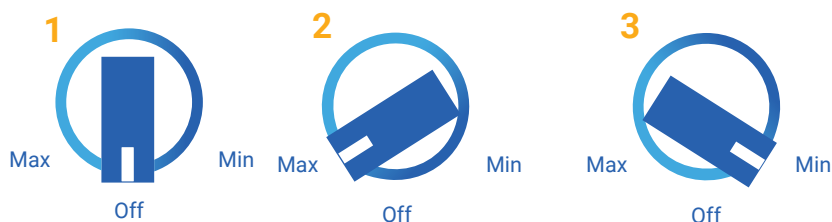

FILTER MAINTENANCE AND REPLACEMENT

Ensure regular maintenance/replacement of filters

The Prefilter

Can be vacuumed from the exterior of the unit once a month or more often. Should be replaced at least after 12 months of use

To vacuum the Prefilter

Use the brush attachment on your vacuum cleaner
Vacuum slowly around the mesh surface of the filter chamber


IMPORTANT SAFETY NOTE

Please ensure air purifier is turned OFF when plugging into a power source. Failure to do so may result in motor potentially stalling and/or burning.




TarBarrier Prefilter

3-6 months

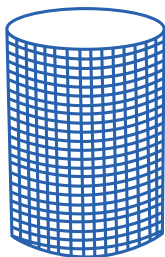

HepaBarrier 600CT Filter
(95 % efficient @ 1 Microns)

12-16 months



26 lbs, Coconut Shell Carbon
Filter (100% Blend), 3 inch
24 months

Technical specifications

**Tobacco smoke odor,
and chemical control**

26 lbs activated Carbon
13"H x 13.25"OD x 7.5"ID

Carbon bed

3 in deep x 570 in² surface

Tar removal

Special TarBarrier filter
570 in² x 1 in deep

Particle supression

HepaBarrier

Air Flow 560 cfm

More cfm than any other
home unit available

Housing

Powder coat steel

Size

23 in x 15 in

Weight

49 lbs total

Watts

120 on high / 40 on low

Sound Level

28.1 db on low (at 6 feet)
62.3 db on high (560 cfm)
(Room level 25.1 db)

ETL Certified

Conforms to CSA C22.2
no 113 ANSI / UL 507



Air purifiers models and filter configurations

	Prefilter	Carbon
Alternates	Cotton Prefilter Poly Prefilter	26 lbs Anthracite Carbon Filter (100% Blend)
Upgrade		26 lbs Impregnated Carbon Filter (17% KI/ Potassium Iodide, 83% Coconut Shell Carbon) 26 lbs Impregnated Carbon Filter (35/65% Blend: KI/ Potassium Iodide, Coconut Shell Carbon)

To open the filter chamber



To close the filter chamber

