



ADVANCING VENTILATION®

RF10-160AC-P-ES24V



ReFresh RF10-160AC-P-ES24V Submittal



Specifications


- ES24V – Envirosense Ventilation Control mounted to outside of unit
- Galvanized, 26 ga., insulated housing
- 6” round duct connectors
- Integral backdraft damper
- Test port for easy air flow measurement
- 2” wide filter slot for optional 10 x 10 x 2” filters
- Integral mounting tabs allow mounting in any orientation
- Backward inclined wheel
- Speed controllable, AC motor, 120V, 60 Hz
- 4 pole, permanently lubricated, thermally protected motor
- Internally mounted rotary speed control to set required intake with high, medium and low set points
- Inlet guard for motor protection
- AMCA Air and Sound Licensed
- HVI Certified performance with and without optional MERV13 Filters
- cULus 507 Listed
- UL 2043 - Suitable for Use In Air Handling Spaces

Options and Accessories


- 10 x 10 x 2” MERV8 or MERV13 filters
- Steel backdraft dampers
- Motorized backdraft damper
- Duct heater

AMCA Performance

RF10-160AC, No Filter

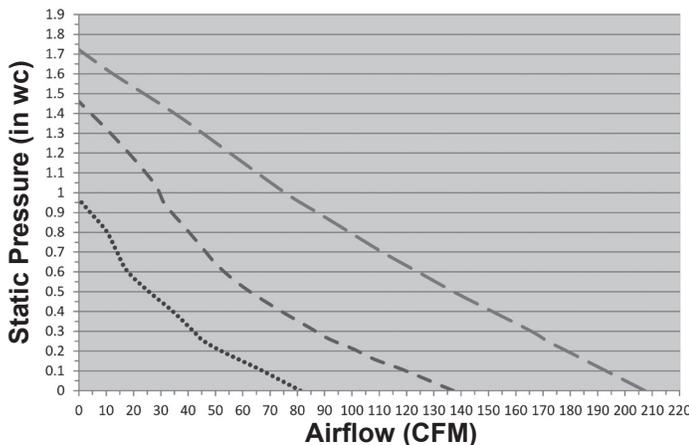

RF10-160AC, MERV 13 Filter

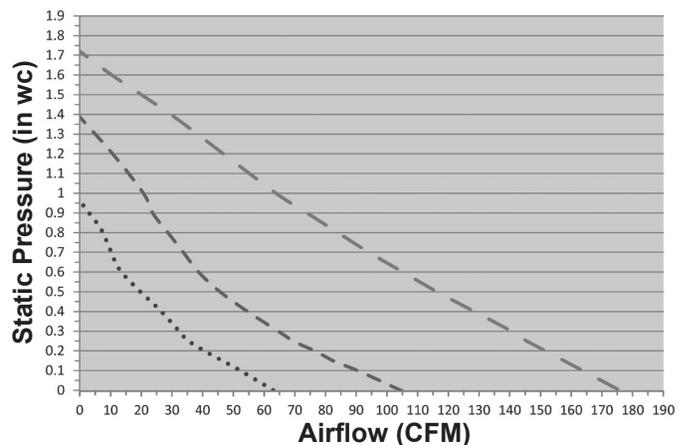

All specifications are subject to change without notice unless approved in submittal by S&P USA.
RF10-160AC-P-ES24V_03022022



ADVANCING VENTILATION®

ReFresh RF10-160AC-P-ES24V

Submittal

HVI Certified Performance

Model	Speed Setting	Speed (RPM)	CFM @ Static Pressure (inches w.g.)								Amps @ .2" SP	Watts @ .2" SP	Efficacy (CFM/Watts) @ .2" SP
			0	.1	.15	.2	.25	.3	.4	.5			
RF10-160AC	LS	1,484	84	66	58	50	41	33	18	10	0.49	40.4	1.7
	MS	1,864	140	121	110	100	91	84	68	52	0.56	53.7	2.1
	HS	2,549	214	196	188	180	172	164	149	135	0.6	72.2	2.6
RF10-160AC (With MERV 13 Filter)	LS	1,581	62	50	45	40	35	28	16	7	0.5	40.8	1.4
	MS	1,895	118	103	97	90	84	78	67	52	0.56	53.6	1.7
	HS	2,510	174	162	156	150	144	139	128	116	0.61	72.7	2.0

Speed is Nominal. Performances at .2" of w.g. are HVI certified.

AMCA Certified Performance


Model	Speed Setting	Speed (RPM)	CFM @ Static Pressure (inches w.g.)								Sones @ .2" SP	Amps @ .2" SP	Watts @ .2" SP
			0	.1	.15	.2	.25	.3	.4	.5			
RF10-160AC	LS	1510	81	60	52	45	38	32	25	17	2.1	0.46	33.6
	MS	1990	137	120	107	97	89	81	68	56	3.3	0.55	50.7
	HS	2540	208	196	188	180	172	163	148	134	5.2	0.61	70.9
RF10-160AC (With MERV 13 Filter)	LS	1600	63	52	46	40	35	32	26	19	2.3	0.46	34.3
	MS	2000	105	91	83	77	70	65	55	46	3.7	0.54	47.7
	HS	2570	175	163	157	151	145	140	128	116	5.1	0.61	71.6

Speed is Nominal. Performance certified is for installation type D: Ducted inlet, Ducted outlet. Performance ratings do not include the effects of apertures.



S&P USA Ventilation Systems, LLC., Div. of Soler & Palau Ventilation Group, certifies that the Models RF10 shown herein are licensed to bear the AMCA Seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirement of the AMCA Certified Ratings Program.

Dimensions (in)

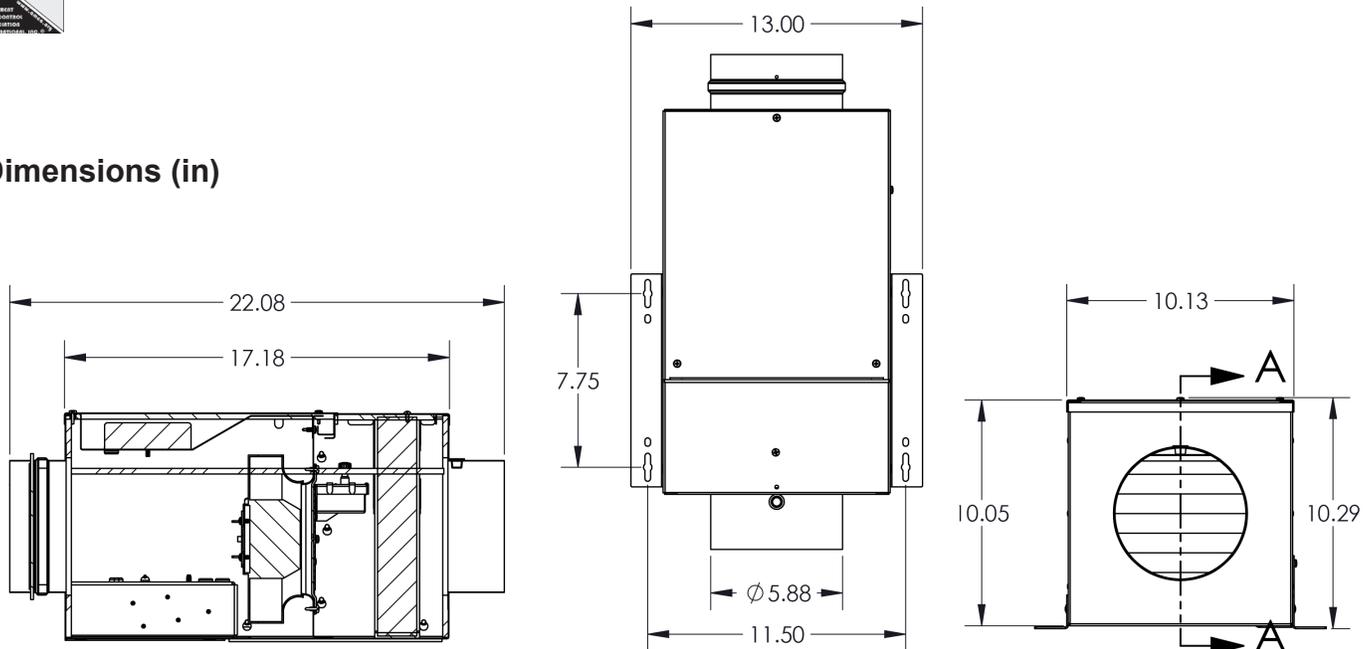

All specifications are subject to change without notice unless approved in submittal by S&P USA.
RF10-160AC-P-ES24V_03022022






ES24V - Envirosense Ventilation Control Submittal

ES24V

The ES24V control can be used with our RF-reFresh, TD-MIXVENT, TD-SILENT, PV-POWERVENT, or TR-ERVs. When paired with S&P fans the ES24V provides fully controllable fresh air into a residence. With three modes (Off, On, and Eco-Mode) the ES24V ensures compliance with today's outside air codes.

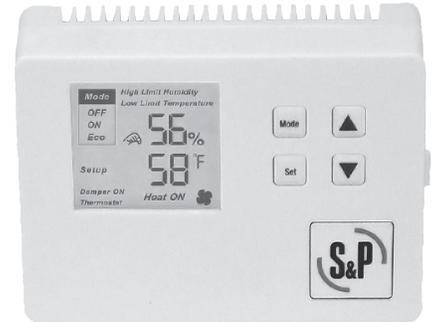

- “Off” allows for manual override as required by the code
- “On” allows for continuous operation
- “Eco-Mode” allows homeowner to set humidity and/or temperature minimum and maximums.
- When readings exceed the programmed min/max parameters the control reverts to a minimum operation sequence to satisfy code requirements. When the outside air is within the min and max range the fan will operate at the set time limit or continuously to meet the code requirements, i.e. 25 minutes every hour.

Features

- Easy to read, back-lit LCD screen
- 24 VAC control
- Intuitive four-button user interface
- Easily programmable to operate the supply fan continuously or intermittently using on and Eco-Modes respectively
- Measures outdoor humidity and temperature and minimizes ventilation at adjustable high and low outdoor temperature and humidity lockouts
- Optional interlocking with central A/C blower motor
- Control programming maintains ASHRAE 62.2-2010 even during high and low temperature and humidity limit lockouts
- Installation flexibility – ability to override humidity and temperature control
- Auxiliary terminals for optional supply fan, duct heater and motorized damper connections

Dimensions

