

Part No. 4046260


PERFORMANCE

	@80°F/60%	@75°F/50%
Capacity (Pints/Day)	321	240
Energy Factor (Pints/kWh)	6.8	5.8
(Liters/kWh)	3.2	2.7
Current draw (amps)	7.2	6.5

ELECTRICAL

Voltage, Phase, Frequency	277V, Single, 60hz
Power (watts) ⁽¹⁾	1,930
Btu/h Total	21,000
Btu/h Motor Load	6,400
Btu/h Heat of Condensation	14,560
Power Cord Type & Length	NEMA L7-15P, 6 ft. 
MCA / MOP	15 amp / 25 amp
CFM	775
Operating Range Temp °F/% RH	56/40 to 95/100
Control	Onboard digital interface with terminal block for external control
Air Filter	MERV-13 20"W x 22" H x 2"D (Part #4042545-01)
Weight	178 lbs.
Refrigerant	R454B, 62 oz.
Drain Connection	3/4" FNPT
P-Trap Required	Yes
Hanging	Built-in 3/8" threaded inserts
Duct Kit	Sold seperately (Part #4042685)
Warranty	3-Year Limited*

*1-year full warranty, plus 2-years of parts replacement.
Anden reserves the right to change specifications without notice.
07.26 B © 2026 Anden | anden.com | 877-420-1330

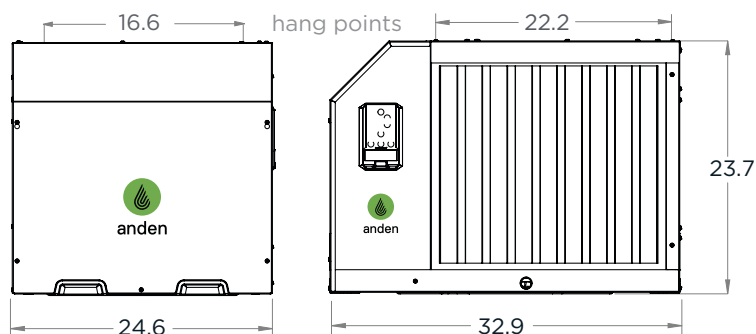

FEATURES

- + **Digital Onboard Control:** easy operation of the machine, with low voltage terminal block for optional external control
- + **Integrated Lift and Hang Points:** allow for easy movement and simple overhead installation
- + **Service Friendly:** removable side panel for easier in-place maintenance and serviceability

INCLUDED ITEMS

Leveling feet, condensate hose, barb fitting



Scan Here for More

