



CJF SERIES

Jet Fans

Canarm Jet Fans (CJF) generate a high-speed and high-pressure directed air jet.

They are designed for general purpose ventilation of parking garages or any other low ceiling applications.


FEATURES

- Low profile, ideal for low ceiling heights
- CJF casing is made of galvanized sheet steel.
- Thrust between 15 -45N air flow up to 3649 CFM
- OSHA protective intake grille.
- Three Phase - single or two speed motors
- Impeller has backward curved steel blades.
- Mount to ceiling with supplied brackets.
- Power is supplied through the external terminal box.


PERFORMANCE SPECIFICATIONS

MODEL	NUMBER OF SPEEDS	UNIT VOLTAGE (V)	FREQUENCY (HZ)	MAX AIR CAPACITY (CFM)	POWER (HP)	THRUST (N)	RPM	OPERATING TEMPERATURE (°C)
50N, SINGLE SPEED								
CJF-50N-1	1	3~208/230/460 or 575	60	3649	2	45	1750	-25 - +40°C
50N, 2 SPEED								
CJF-50N-2B	2	3~208/230/460 or 575	60	3649 / 1825	2	45 / 15	1750/882	-25 - +40°C

DIMENSIONS

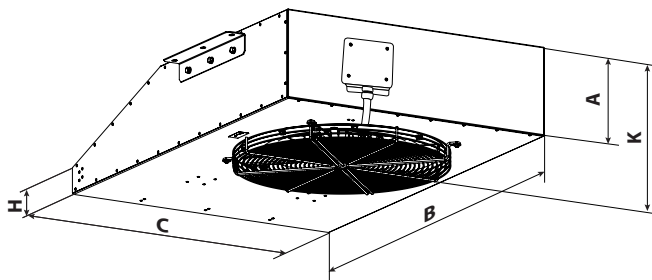

18" INLET + WHEEL IN 32" WIDE BODY

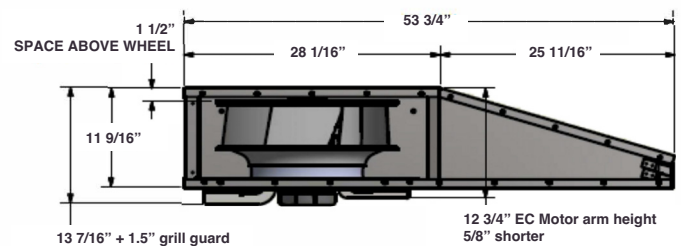

MODEL	A	B	C	H (DISCHARGE)	K	WEIGHT
CJF-50N-1	11 9/16"	53 3/4"	32"	3 1/2"	15"	215 lbs
CJF-50N-2B	11 9/16"	53 3/4"	32"	3 1/2"	15"	215 lbs