


# FLEXIBLE ALUMINUM FOIL DUCTING

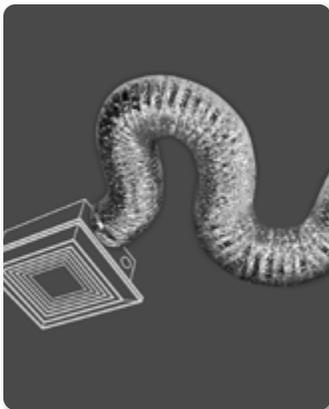

- Ideal for use in bathroom fan venting and other general purpose exhaust applications
- Made from 3 ply aluminum foil laminate
- Maximum operating temperature of 250°F
- UL listed and marked class 1 air connector.
- Tear and puncture resistant
- Will not support combustion

Product Code	UPC Code 060672	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
AF325	133000	3" x 25'	Standard Carton	1	2	0.44
AF425	133017	4" x 25'	Standard Carton	1	2	0.44
AF450	133253	4" x 50'	Standard Carton	1	4	0.60
AF525	133048	5" x 25'	Standard Carton	1	3	0.44
AF625	133055	6" x 25'	Standard Carton	1	3	0.45
AF725	133079	7" x 25'	Standard Carton	1	4	0.45
AF825	133086	8" x 25'	Standard Carton	1	4	0.72
AF1025	133109	10" x 25'	Standard Carton	1	5	1.22
AF1225	133116	12" x 25'	Standard Carton	1	7	1.22
AF1425	133178	14" x 25'	Standard Carton	1	8	1.44
AF1625	133185	16" x 25'	Standard Carton	1	9	1.98
AF1825	133192	18" x 25'	Standard Carton	1	11	2.48
AF2025	133208	20" x 25'	Standard Carton	1	12	2.72

## UL 181 Listed And Marked

Product Code	UPC Code 060672	Size	Packaging	Pack Qty.	Pack Wt. (lbs)	Pack Cube (cu. ft.)
AF325UL	136032	3" x 25'	Standard Carton	1	2	0.44
AF325ULPZ	133277	3" x 25'	Polybag	4	8	1.26
AF425UL	136049	4" x 25'	Standard Carton	1	2	0.44
AF425ULPZW	133260	4" x 25'	Polybag / Cut Case	8	17	2.13
AF450UL	136216	4" x 50'	Standard Carton	1	4	0.60
AF525UL	136056	5" x 25'	Standard Carton	1	3	0.44
AF625UL	136063	6" x 25'	Standard Carton	1	3	0.45
AF625ULPZW	136292	6" x 25'	Polybag / Cut Case	6	10	2.28
AF725UL	136070	7" x 25'	Standard Carton	1	4	0.45
AF825UL	136087	8" x 25'	Standard Carton	1	4	0.72
AF1025UL	136100	10" x 25'	Standard Carton	1	5	1.22
AF1225UL	136124	12" x 25'	Standard Carton	1	7	1.22
AF1425UL	136148	14" x 25'	Standard Carton	1	8	1.44
AF1625UL	136162	16" x 25'	Standard Carton	1	9	1.98
AF1825UL	136186	18" x 25'	Standard Carton	1	11	2.48
AF2025UL	136209	20" x 25'	Standard Carton	1	12	2.72

**Code Compliance:**

Dundas Jafine recommends that you check with the local code body, having jurisdiction in your area, to determine applicable codes. UL 181, NFPA 90A & 90B, BOCA, ICBO, SBCC, HUD/FHA MIN. Property STD.


**Static Pressure - Positive:** 10 in. WC

**Static Pressure - Negative:** 1/2 in. WC

**Maximum Velocity:** 5500 FPM

**Temperature Range:** -20°F to 250°F

**Bending Radius:** 1 x diameter

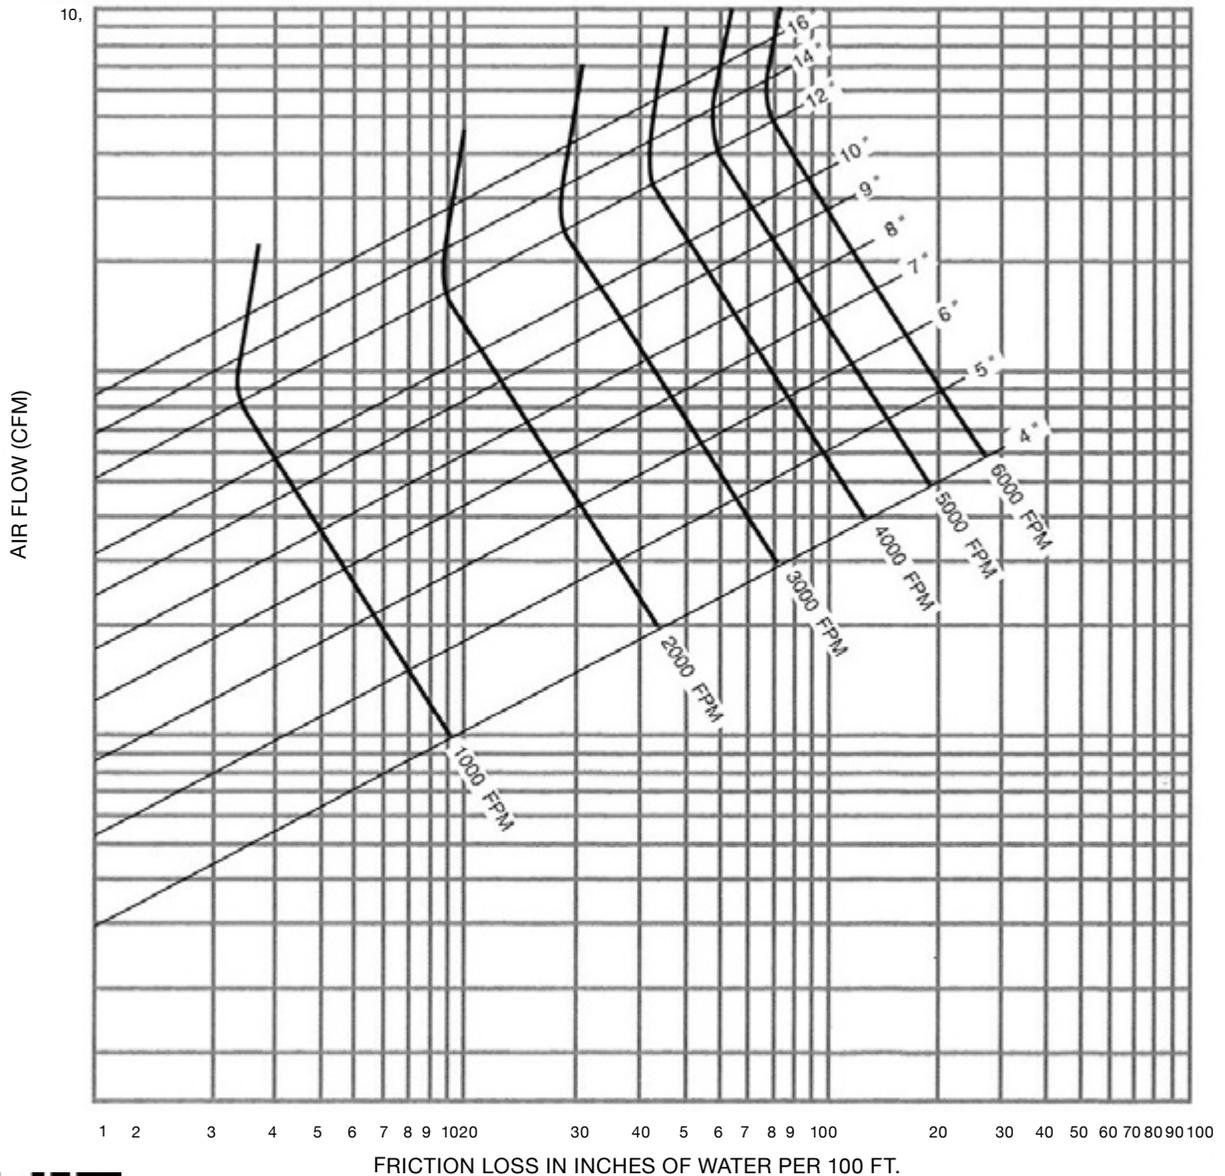

Scan this QR code to view helpful product feature and installation videos

11099 Broadway, Alden, New York, USA 14004  
80 West Drive, Brampton, Ontario, Canada L6T 3T6

1.800.387.2578  
dundasjafine.com