

Hisense

8000
BTU

Window Air Conditioner
With Inverter technology &
ConnectLife App
350 SQ. FT

Significant Features

- 2 year warranty – twice as long as others
- Less energy consumption and stable temperature control thanks to inverter technology
- ConnectLife app allows easy control on your mobile phone anytime, anywhere
- 3 different modes (Cooling, Fan, Dehumidifier) for flexible usage
- Fan mode for better air circulation
- Dehumidifier mode to remove excess moist
- Washable, removable filter for easy maintenance
- 4-way air direction provides even distribution of cool air
- Meets ENERGY STAR® standards, saving on energy costs



2 Year Warranty



Inverter Technology



**3 Modes – Cool,
Fan and Dehumidifier**



**ConnectLife
Smart App**



115 Volt/15 Amps.



E Star Certified



The Hisense Window Air Conditioner with inverter technology, best suited for smaller rooms (350 sq. ft. or less) with 8,000 BTU of cooling power, is packed with various efficient, easy to use features. Hisense inverter technology saves energy and maintains stable temperature at desired level by varying rotation speed of compressor. E-star certified air conditioner can reduce energy consumption, which in turn, helps to save money. With ConnectLife app on your mobile phone, you can turn on/off your air conditioner or adjust the setting wherever, whenever. The maintenance is simple thanks to the washable and removable filter. 2 year warranty on both parts and labor is another reason why you should buy Hisense air conditioner!

All product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2019 Hisense USA. All rights reserved.

Hisense

350
SQ. FT

Window Air Conditioner
8,000 BTU

Performance	
Cooling Capacity (BTUs/hr)	8,000
CEER	15
Coverage	350 sq ft
Dehumidification Pint/ 24 hr	21.6
Refrigerant	R-32/ 260g
Airflow (CFM) (High/ LOW)	162-210
Noise Level (dB)	41/ 50/ 54
Electrical	
Voltage/ Frequency/ Amps	115V, 60 Hz, 9.6A
Plug Type/ NEMA#	A/ 5-15P
Watts-cooling	690
Electrical Receptacle	115V/ 15A
Power Cord Length (feet)	6ft. (1.8m)
Control Features	
Thermostat Type	Electronic
Fan Speeds - Cool/Fan	3/ 3
Display Type	LED
Timer	YES
Unit Features	
Chassis Type	Fixed
Air Deflection	4-Way
Air Discharge Type	Top
Washable Filter	YES, Easy Access
Accessories	
Installation Kit	YES
Remote Control	YES
Approvals	
Safety	cULus
Energy Star	YES


Product Dimensions	
Unit Dimension W x H x D (mm)	470×335×480
Net Weight (kg) (Kits Not included)	20.2
Unit Dimension W x H x D (inch)	18.5×13.2×18.9
Net Weight (lb) (Kits Not included)	44.5
Product	
Parts & Labor	2 years
UPC	810088361722

Related Images


Simple and easy to use tough control



Window Opening

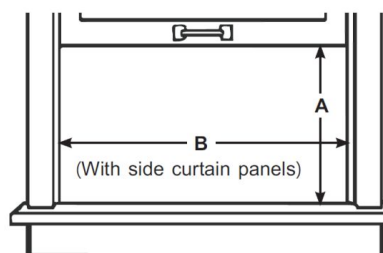

A: 13 4/5" (35.1cm) min
B: 24 1/2" (62.2cm) - 39" (99cm)



All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise. ©2021 Hisense USA, All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024
1-888-935-8880
www.hisense-usa.com