

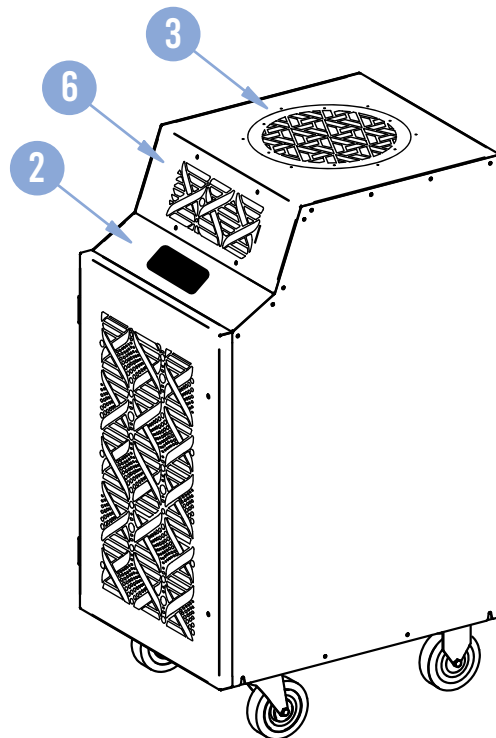
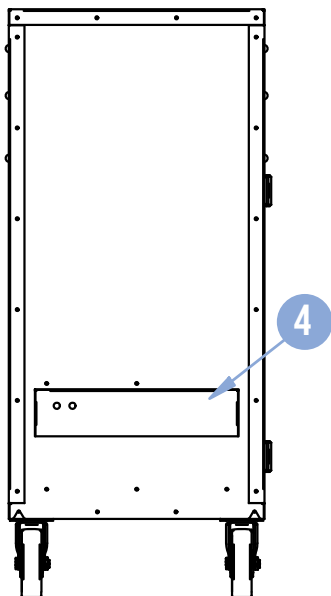


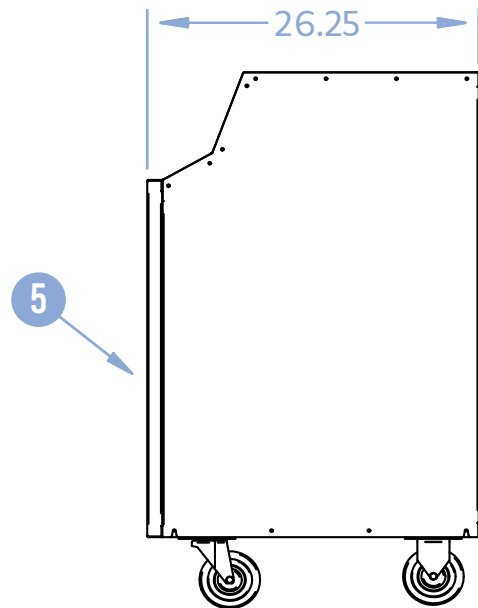

SPECIFICATIONS

KBP1800

DESCRIPTION		
	1800 CFM Combination Air Scrubber / Negative Air Machine	
AIR PURIFICATION		
	ULPA/HEPA Filter	99.97% @ > .3 Microns
	UVC Light Wave Length	UVC 30 Watts / Max 85 Watts x2
FAN DATA		
	Fan Type (Centrifugal)	Direct Drive
	Air Flow (CFM) at zero external static	1800/1675/1550 - 3 Speed / Quad Directional
	Air Flow (CFM) with one opening closed	1600/1375/1250 - 3 Speed / Quad Directional
	Top Discharge Stainless Flange	12 In.
	Optional CK-12S-SS Ceiling Kit	Optional 12" Dia. Ceiling Kit
ELECTRICAL DATA		
	Power Supply (Volts)	115 V / Single Phase
	Current Consumption (Amps)	9.95
	Power Consumption (kW)	0.83
	Maximum Circuit Breaker (Amps)	20
	Recommended Breaker Size	15
	Minimum Circuit Ampacity (Amps)	12.67
	Min/Max Voltage	105 - 125
	Power Cord Gauge / Length in Feet	14 AWG / 6'
	Plug Configuration	NEMA 5 - 15
DIMENSIONAL DATA		
	Width x Length x Height (inches)	23" x 26.25" x 46"
	Weight (lbs)	135
	Shipping Weight (lbs)	170
	Ceiling Kit - CK - 12SS (lbs)	12
	Total Shipping Weight w/ Ceiling Kit (lbs)	192
SAFETY DEVICE DATA		
	Fan Motor Overload	Automatic Internal
	Automatic Restart	Yes

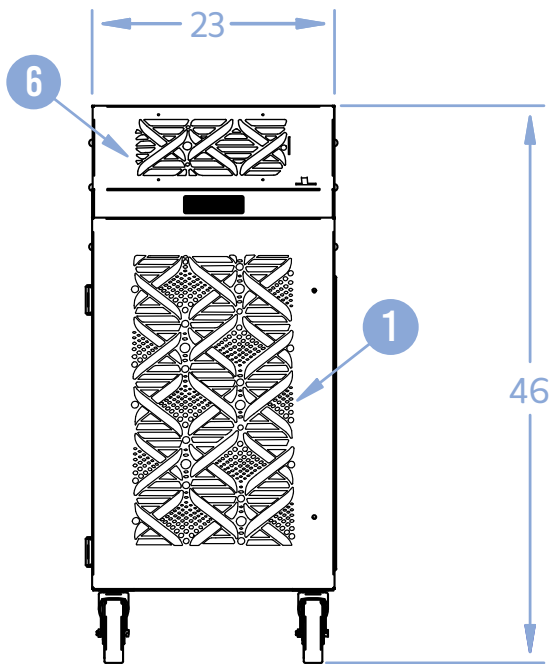

KBP1800

LEGEND

- | | |
|---------------------------------|----------------------------|
| 1. Room Air Return | 4. Cord Storage |
| 2. Control Panel (Touch Pad) | 5. Filter Access Door |
| 3. Filtered Negative Air Supply | 6. Cleaned Room Air Supply |



ETL LISTED CONFORMS TO ANSI/UL1995
CERTIFIED TO CAN/CSA 22.2 NO 235