



746 480V | PN 4046320

PERFORMANCE

°F %RH	80 60	75 50
Water Removal (P/Day)	730	480
Efficiency (P/kWh)	8.3	6.1
Energy Factor (L/kWh)	3.9	2.9

ELECTRICAL


°F %RH	80 60
Supply Voltage	480V, 3-Phase
Current Draw	4.9A
MCA*	15A
MOP*	15A
Recommended Breaker Size	15A
Power	3,665W
Power Cord	Hardwire only, no cord
CFM	1,650
BTU (Total)	45,700
BTU (Heat of Condensation)	33,200
BTU (Motor Load)	12,500

SPECS

Control Type	External control required (not provided)
Refrigerant Type	R454b
Refrigerant Amount	6 lb 8 oz
Weight	300 lb
Air Filter MERV Rating	MERV-13
Dimensions	18" x 20" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min-95 F Max



DIMENSIONS

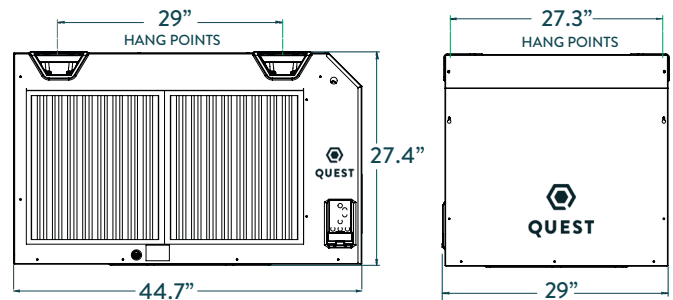

FEATURES

- + **Patented M-CoRR™ Technology:** unique multi-coil design achieves highest efficiency available in its class
- + **Superior MERV-13 Filtration:** removes more harmful contaminants from the air, such as mold, bacteria, and some viruses; 20% more effective than MERV-11
- + **Integrated Lift and Hang Points:** allows for easy movement and flexible installation
- + **Lowest Amp Draw:** freeing up electricity for other equipment
- + **Onboard Digital Controls:** enables easy and precise setpoints with self diagnostics

Specifications are subject to change without notice. Drawings are not to scale. *See manual for details on MCA/MOP.

QUESTCLIMATE.COM / (877) 420-1330

