

Mini Tank

CONDENSATE REMOVAL TANK PUMP



The new and improved Mini Tank pump can be wall mounted, floor mounted, in-pan or suspended on rod between 5/16" and 3/8" in diameter. Using piston technology this is a compact, powerful and multi functional tank pump.



9 US Gal/h
/ 35L/h max. flow






39ft / 12m max. rec. head
(flow rate 2.6 US Gal/h / 10L/h)

KEY FEATURES

- Four ways to install
- Compact & discreet
- Can be located in drain pan
- Easy maintenance

SUITABILITY

- Up to 12ton / 157,000Btu/h
 - Ducted units; Floor standing & chassis units; Cassette units
- ✓ **Perfect for...** Installation versatility

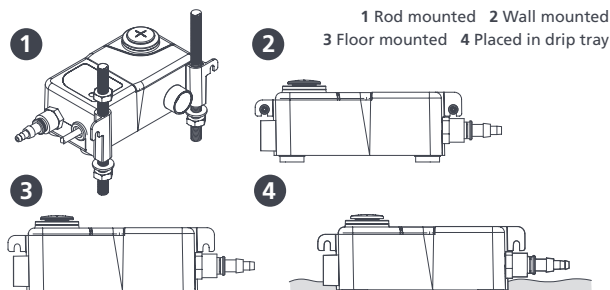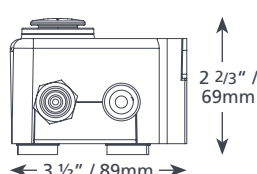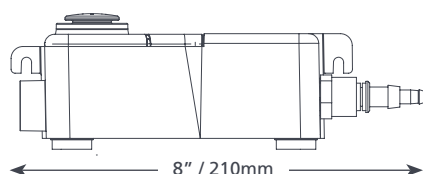

MINI TANK @ 230 VAC 60Hz



Max. flow @ 0 head	9 US Gal/h / 35L/h
Max. rec. head	39ft / 12m
Tank capacity	0.06 US Gal / 0.24L
dB(A) @ 3ft / 1m	35
Power supply	230 VAC, 0.1A, 16W, 50/60Hz
Rated	Non continuous
Class	II appliance ☐
Max. unit output	12ton / 157,000Btu/h
Max. water temp	104°F / 40°C
Inlets	2x 3/4" / 22mm, 1/2" / 12mm & 1 1/8" / 27mm
Outlets	1/4" / 6mm & 3/8" / 10mm
IP Protection	IP65
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓

MINI TANK OPTIONS

Mini Tank FP1056/RS

IN THE BOX

Mini Tank pump (including hard wired 39" / 1m power cable) • 2x Rubber adaptors (3/4" / 21.5mm & 1 1/4" / 31mm) • Anti siphon device • Inline Fuse • Fixing kit • Install manual

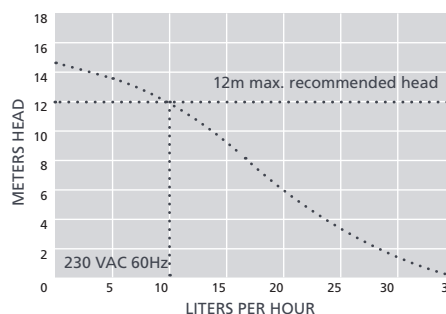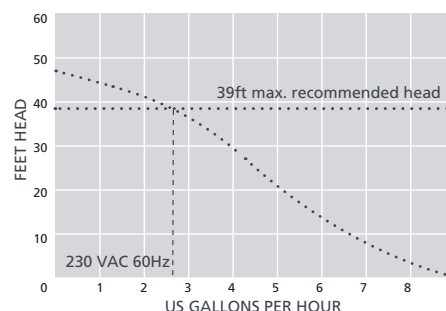

► View install video at aspenpumps.com

Information correct at time of going to press.