

NORMALLY CLOSED 4” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

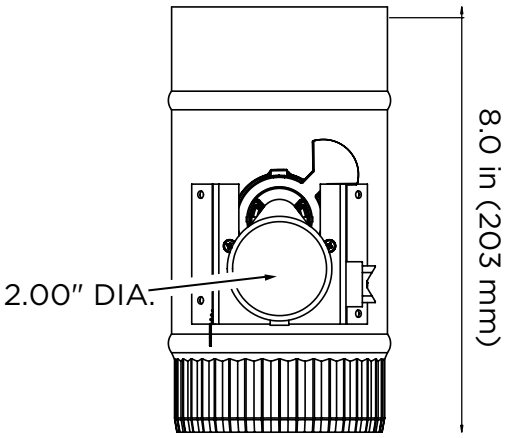

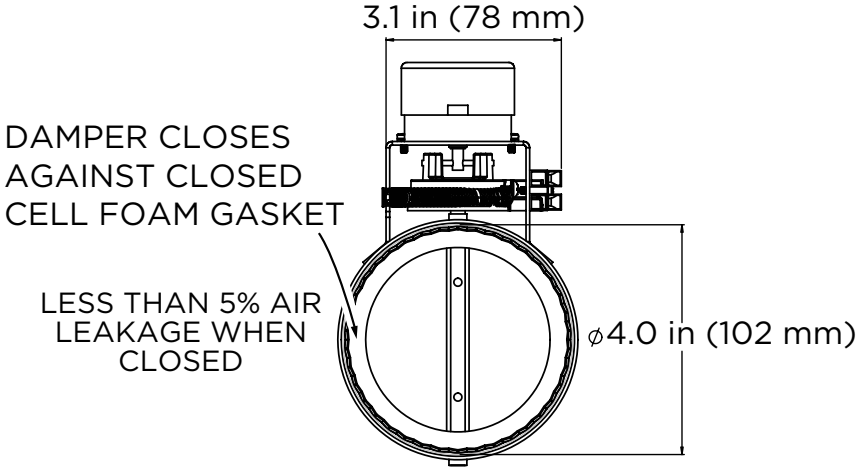

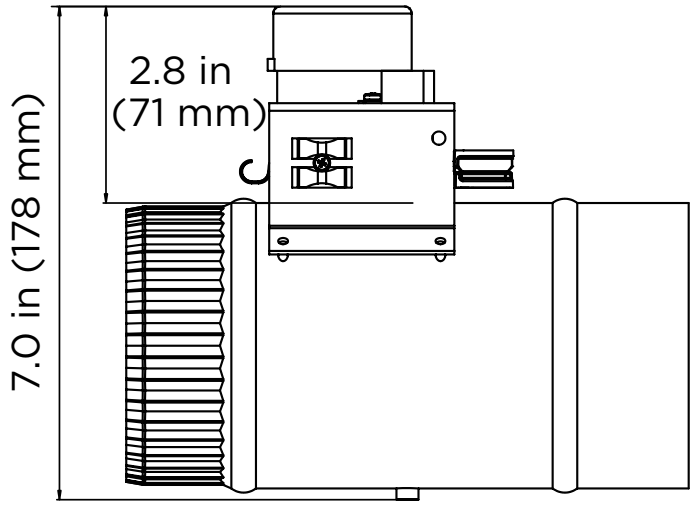

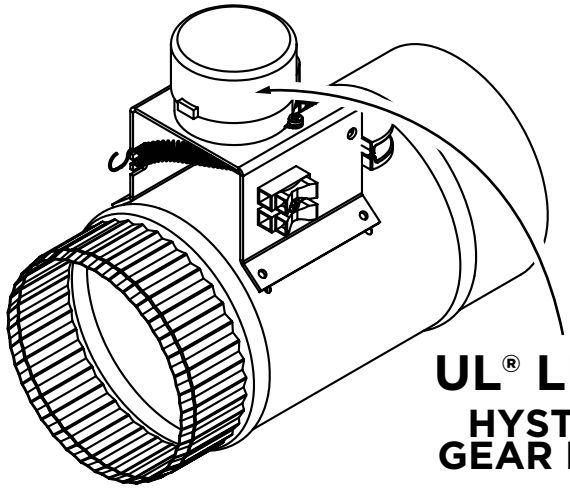

2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC204

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

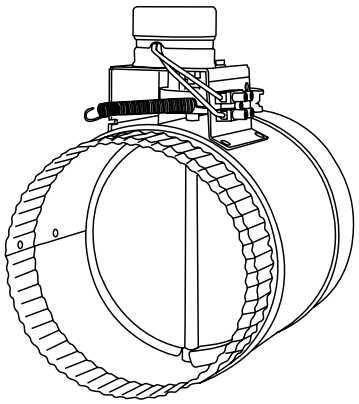

Model: ZC204

4” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

4” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC204	1.70 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022042	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022040	9.00	17.75	17.00	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZC204

SUNCOURT®


ZONE MASTER™
AUTOMATED AIRFLOW CONTROL


NORMALLY CLOSED 4” 24V HVAC MOTORIZED DAMPER

ENGINEERED & ASSEMBLED IN USA

3 YEAR LIMITED WARRANTY
3 YEAR WARRANTY

N.T.S.

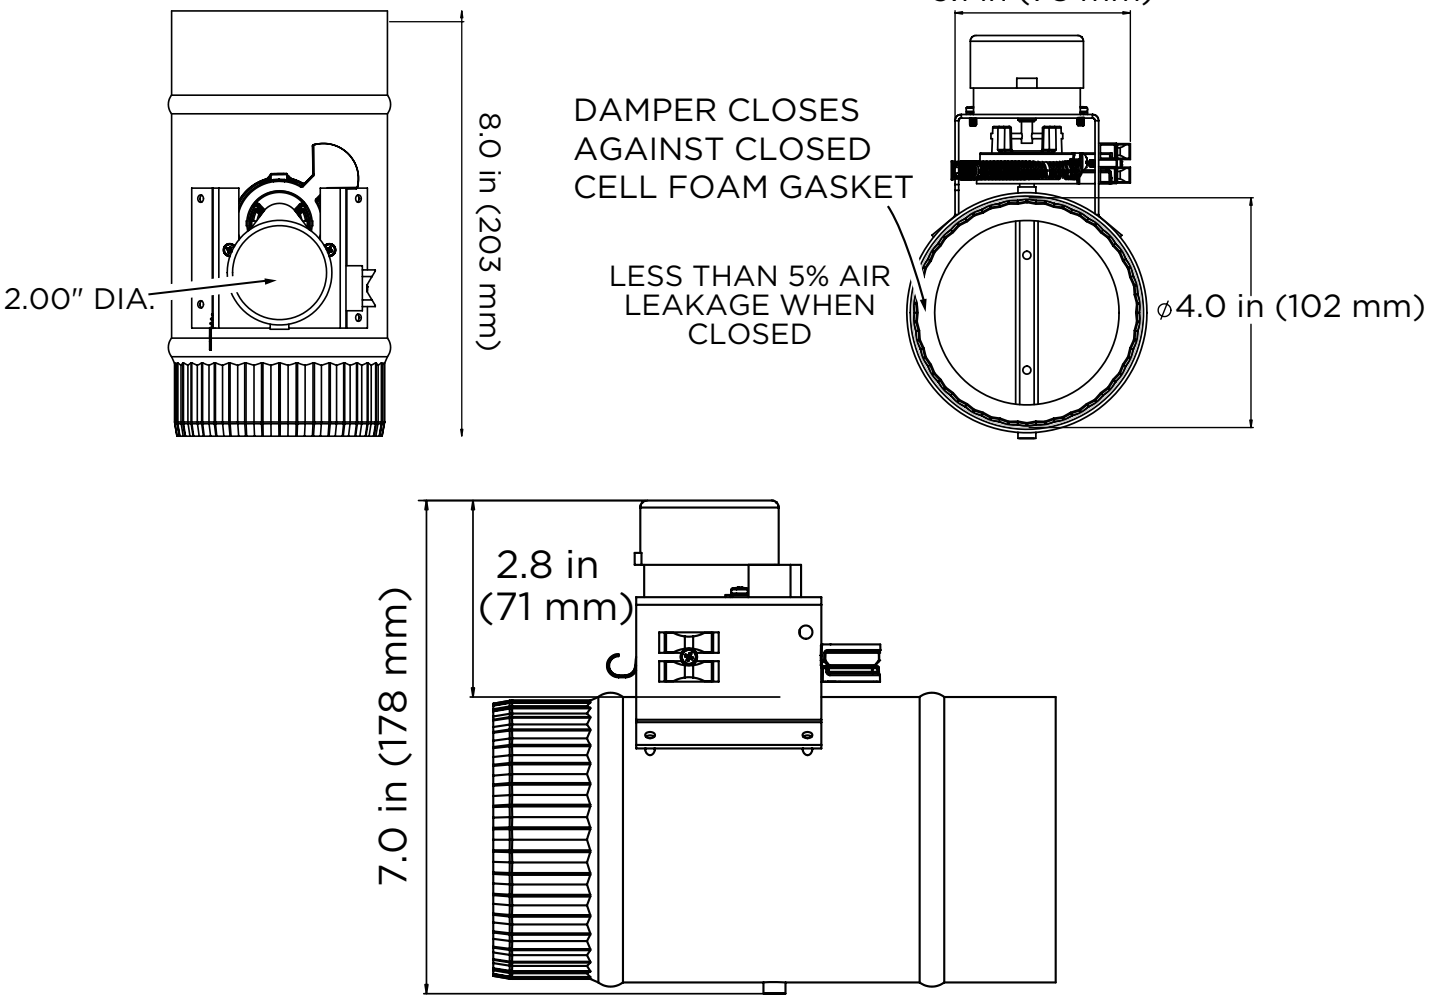


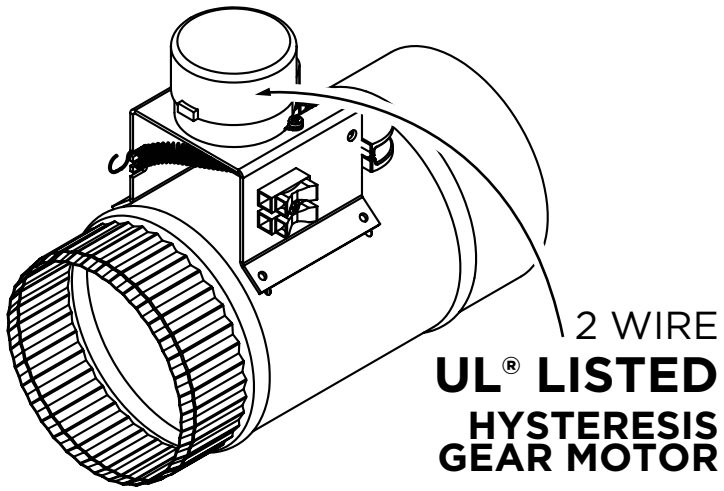

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC204S

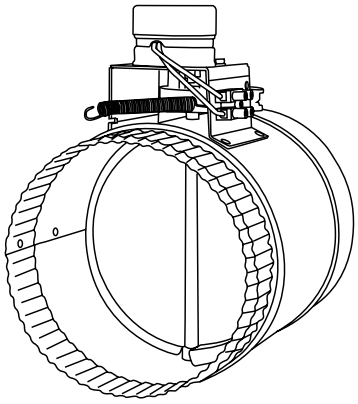

Model: ZC204S

4” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

4” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC204S	1.70 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022035	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022033	9.00	17.75	17.00	13.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC204S


NORMALLY CLOSED 4” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY

N.T.S.

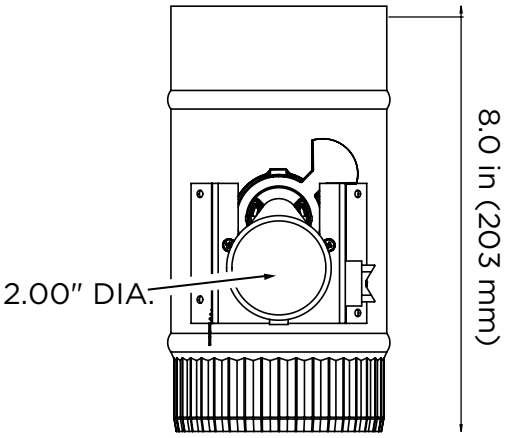

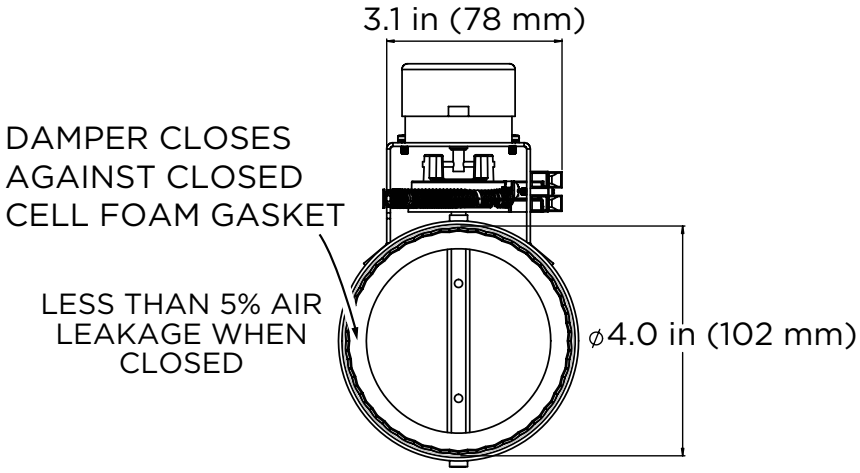

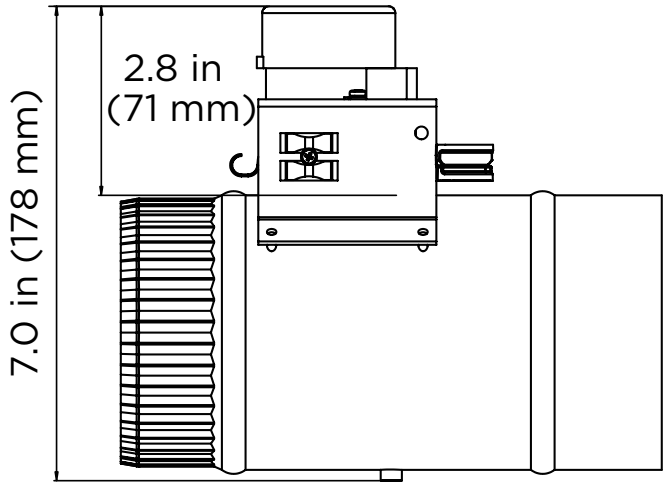

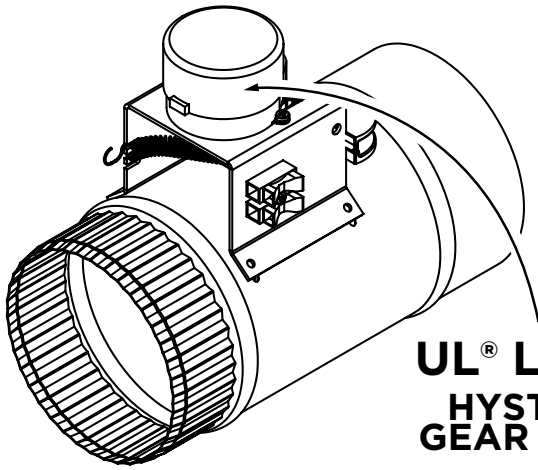

2 WIRE

UL® LISTED


HYSTERESIS GEAR MOTOR

Mounting Hardware Included: (6) #6 Sheet metal screws

Transformer Not Included

MODEL: ZC204X

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

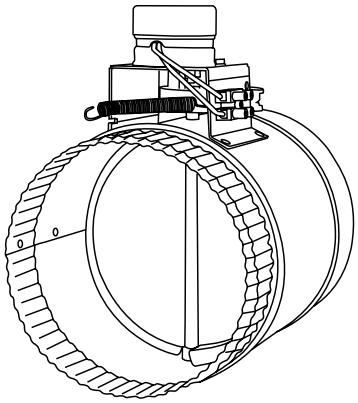

Model: ZC204X

4” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

4” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC204X	1.70 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022028	8.375	8.50	8.375	2.00
Master Case (4 qty):	40066028022026	9.00	17.75	17.00	10.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC204X


NORMALLY CLOSED 5” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

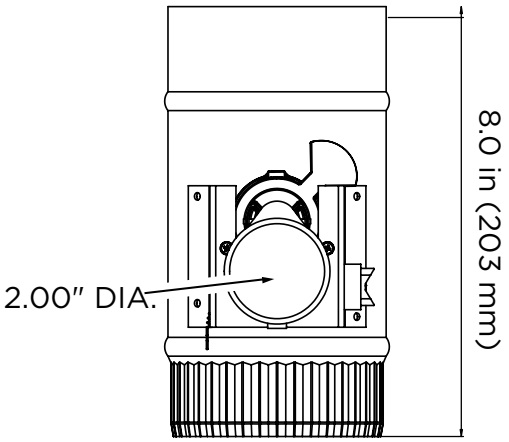

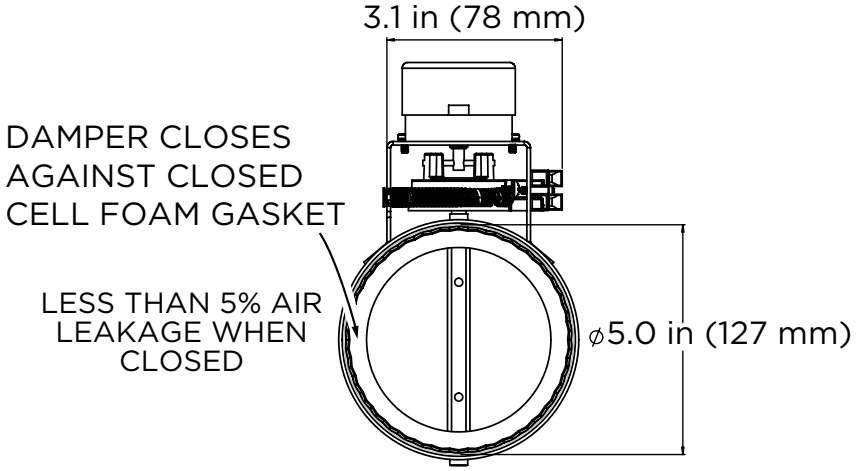

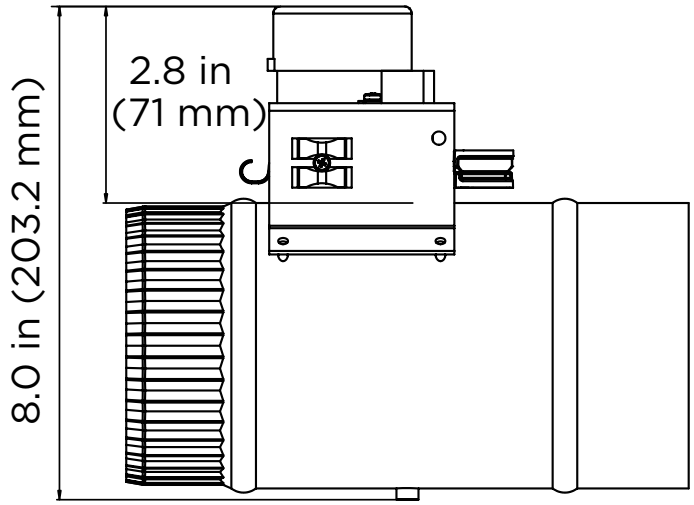

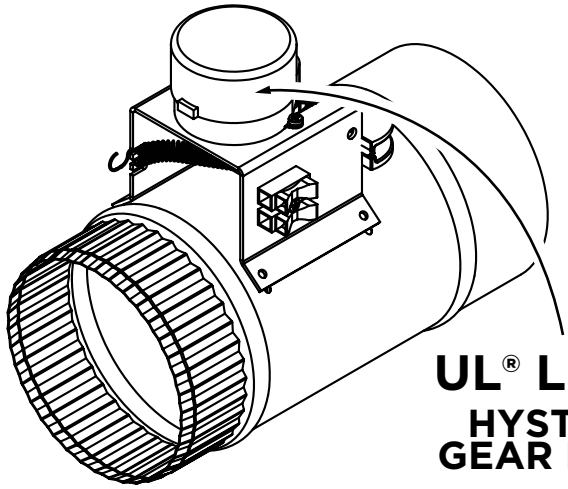

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC205

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

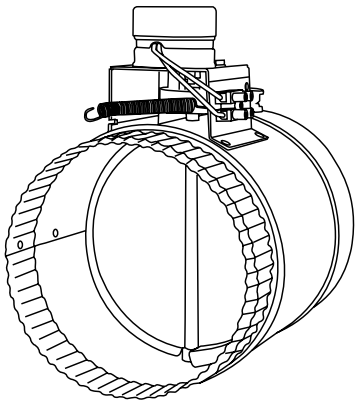

Model: ZC205

5” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

5” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC205	1.94 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022509	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022507	9.00	17.75	17.00	15.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC205


NORMALLY CLOSED 5” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

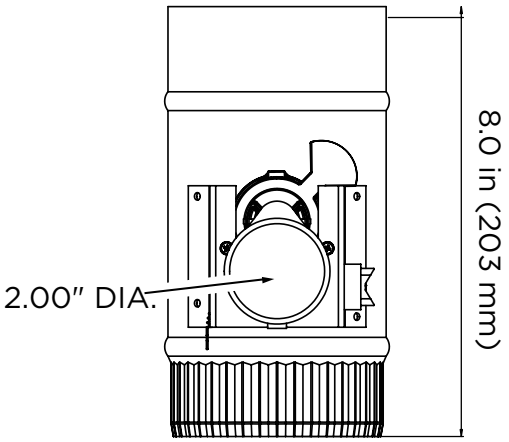

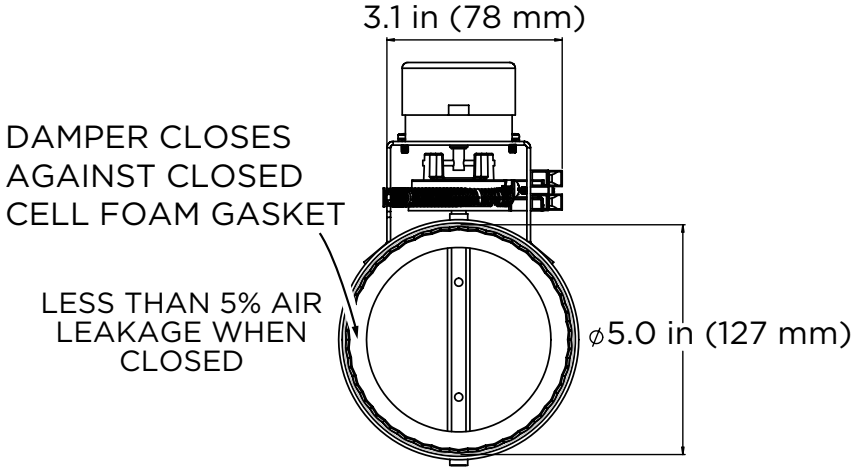

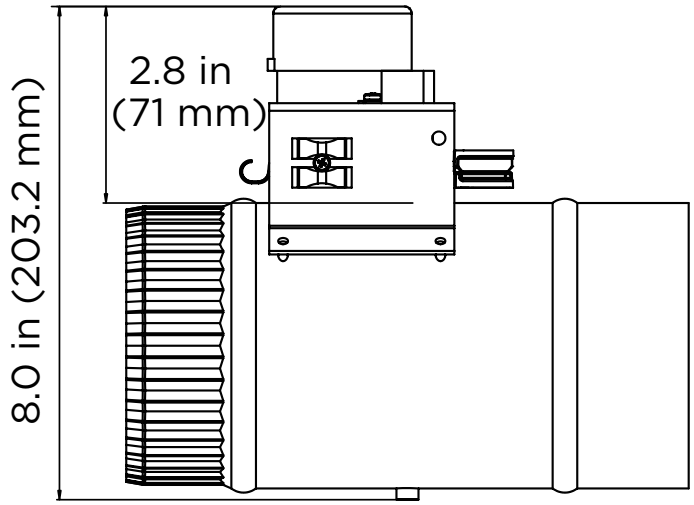

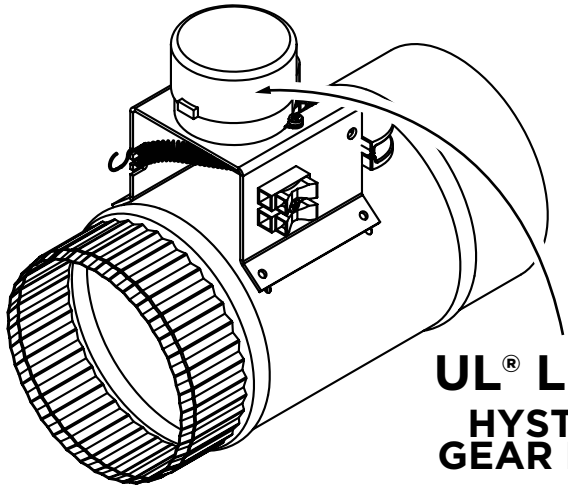


2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz

Dimensions:
2.25 in L × 2 in W × 2.5 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC205S

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

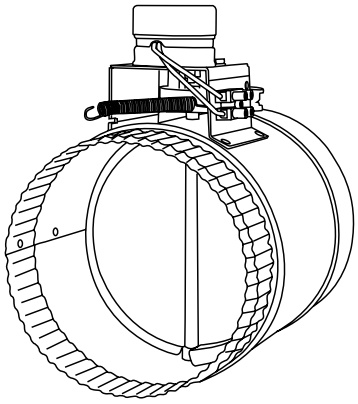

Model: ZC205S

5” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

5” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC205S	1.94 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022516	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022514	9.00	17.75	17.00	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC205S


NORMALLY CLOSED 5” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY
3 YEAR WARRANTY

N.T.S.

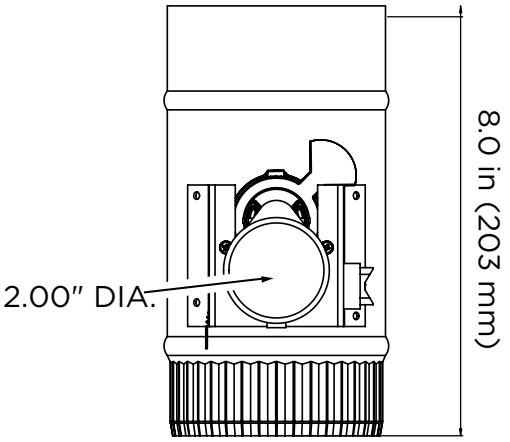

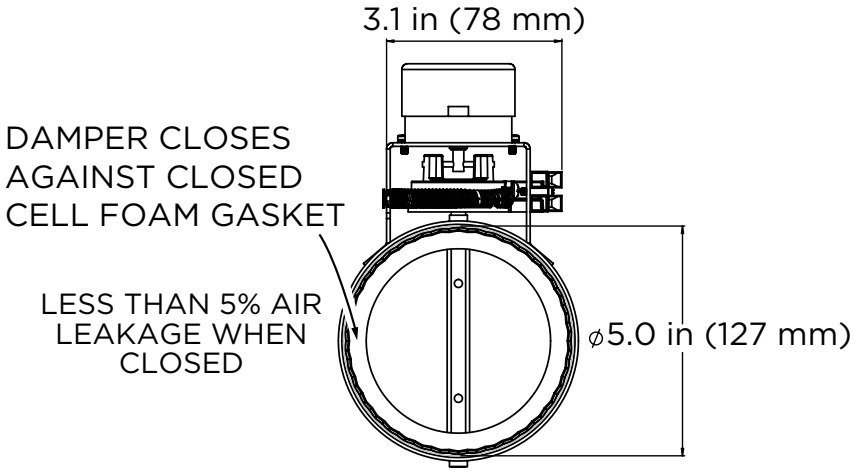

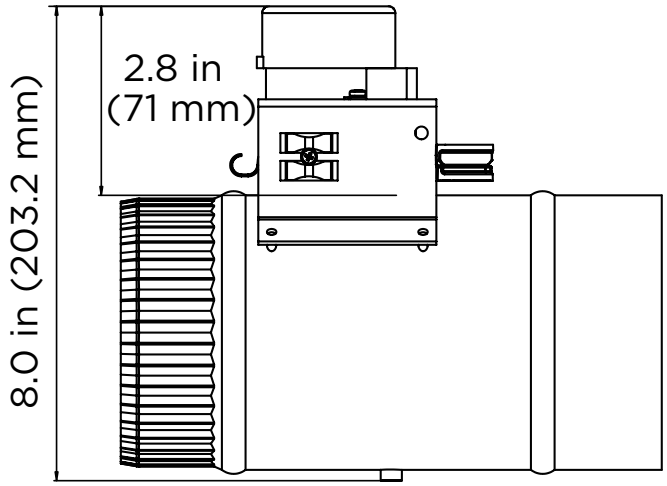

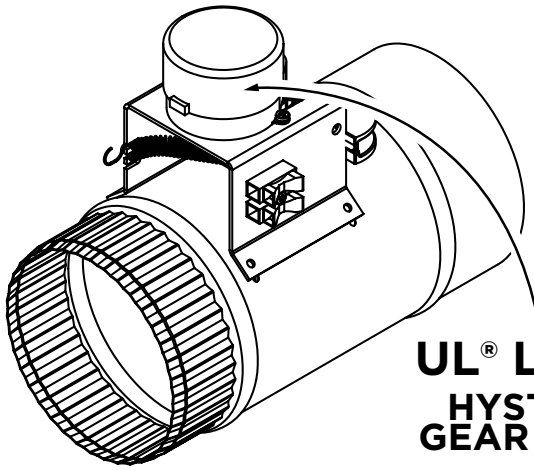

2 WIRE


UL® LISTED

HYSTERESIS GEAR MOTOR

Mounting Hardware Included: (6) #6 Sheet metal screws

Transformer Not Included

MODEL: ZC205X

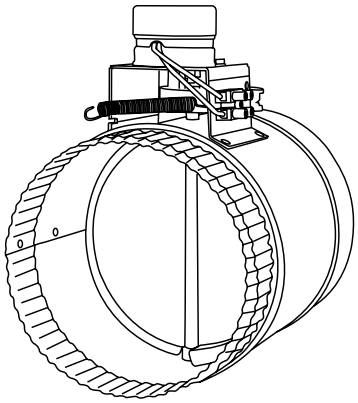

Model: ZC205X

5” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

5” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC205X	1.94 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022523	8.375	8.50	8.375	2.00
Master Case (4 qty):	40066028022521	9.00	17.75	17.00	10.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC205X


NORMALLY CLOSED 6” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

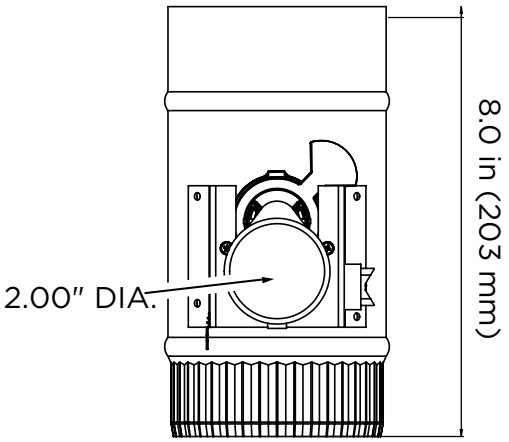

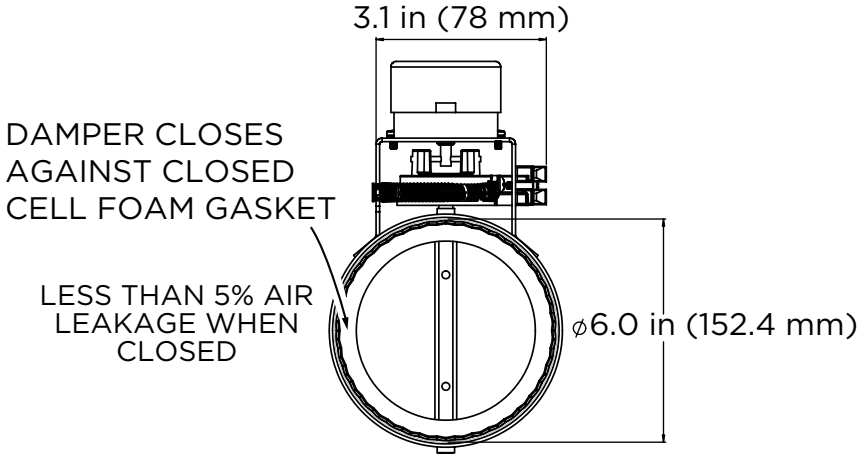

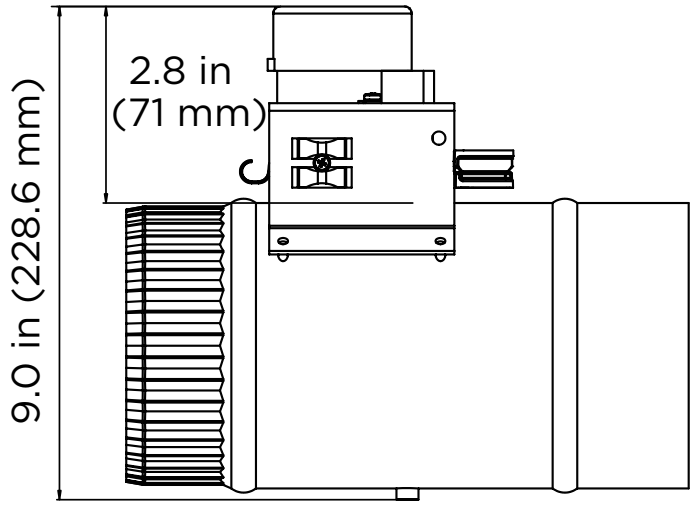

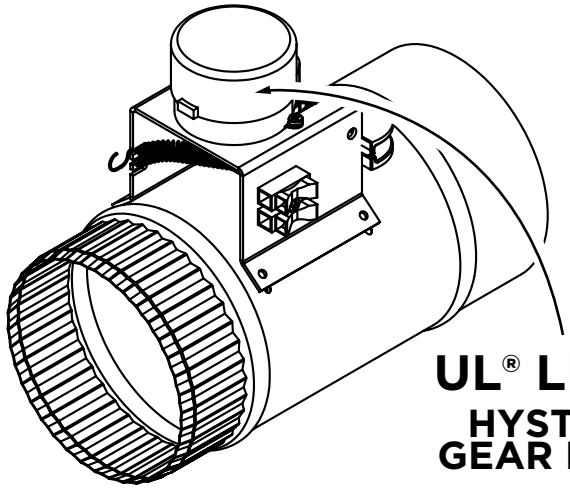

2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC206

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

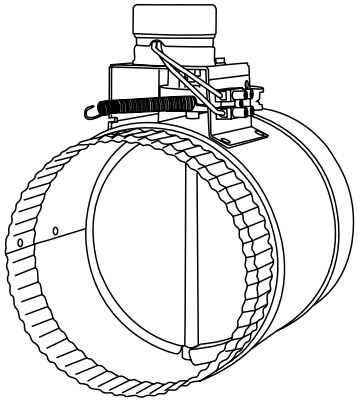

Model: ZC206

6” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

6” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC206	2.18 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022066	8.375	8.50	8.375	4.00
Master Case (4 qty):	40066028022064	9.00	17.75	17.00	16.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC206


NORMALLY CLOSED 6” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY
3 YEAR WARRANTY

N.T.S.

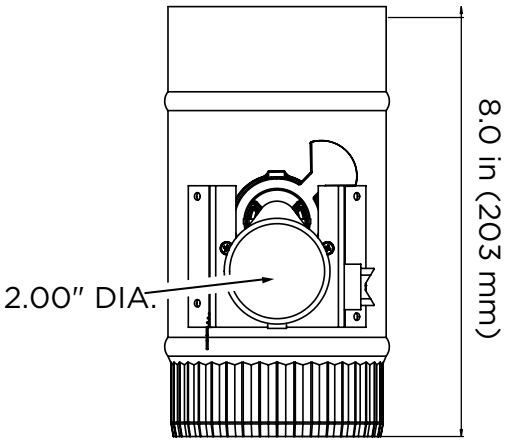

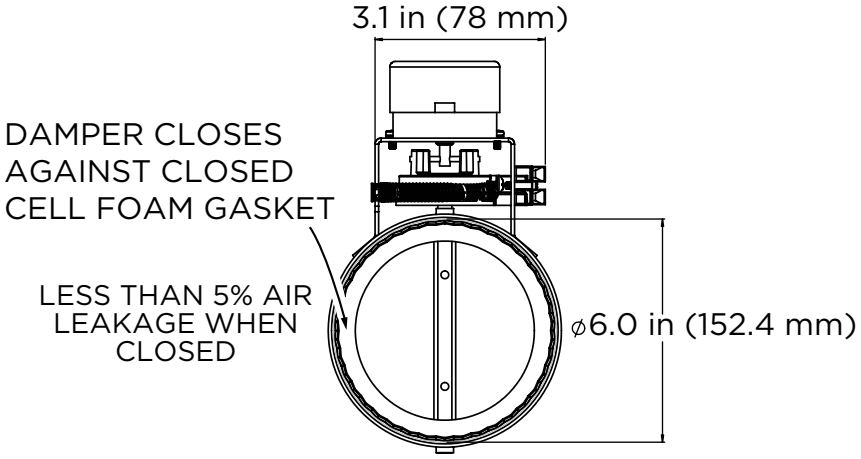

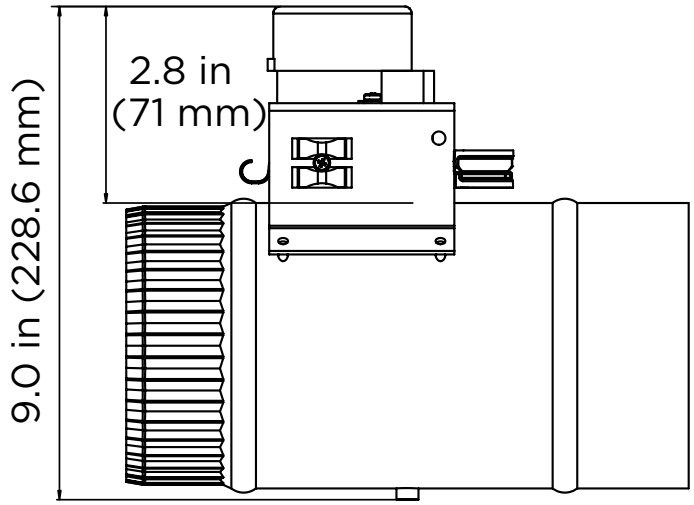


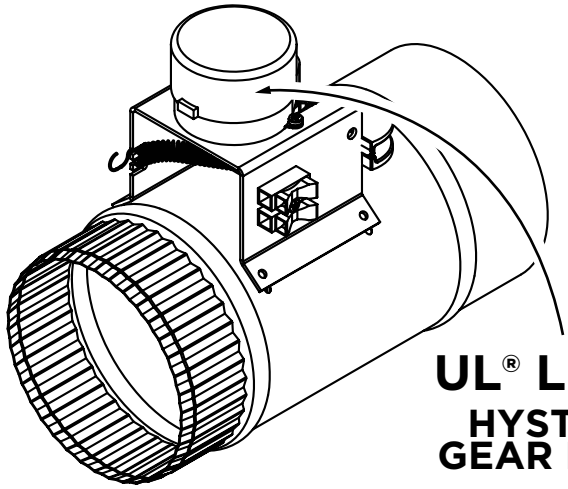

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC206S

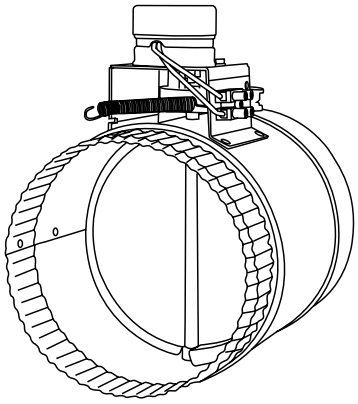

Model: ZC206S

6” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

6” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC206S	2.18 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022615	8.375	8.50	8.375	4.00
Master Case (4 qty):	40066028022613	9.00	17.75	17.00	16.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC206S


NORMALLY CLOSED 6” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY

N.T.S.

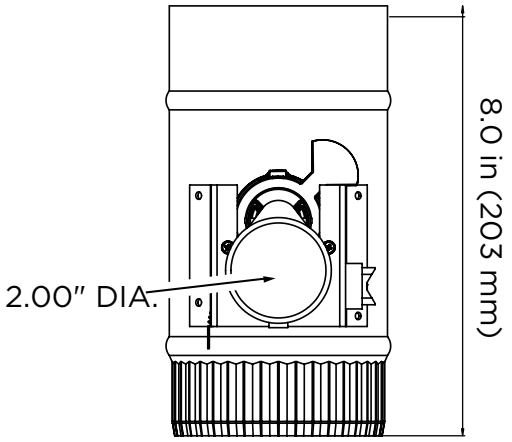

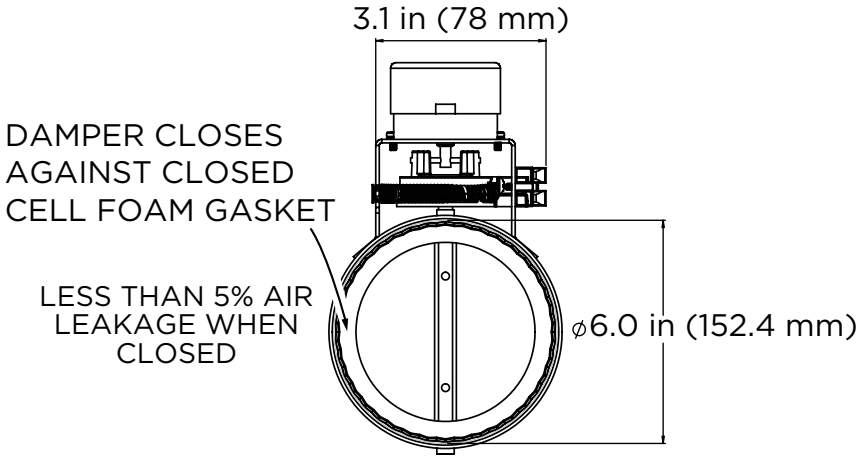

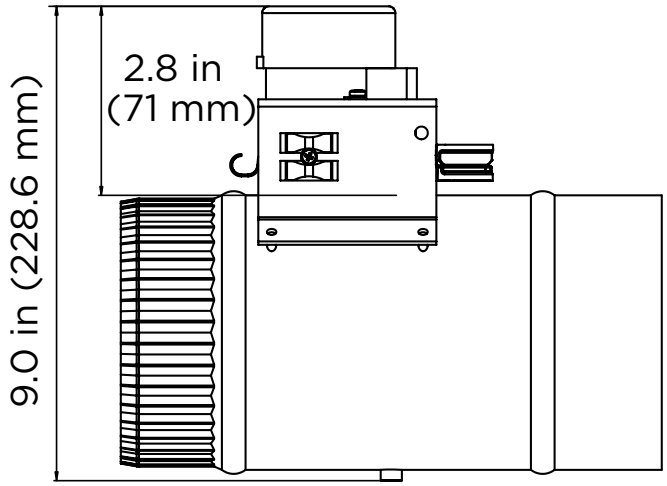

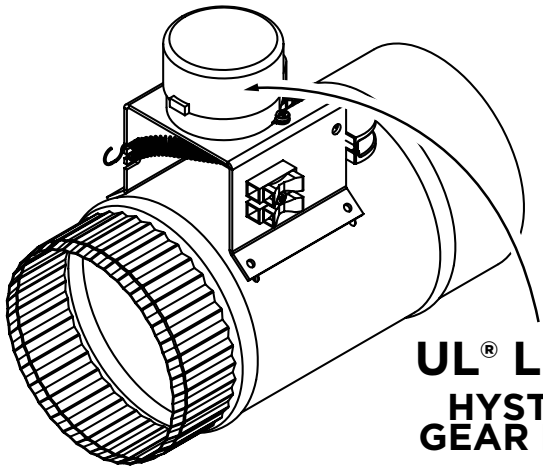

2 WIRE

UL® LISTED


HYSTERESIS GEAR MOTOR

Mounting Hardware Included: (6) #6 Sheet metal screws

Transformer Not Included

MODEL: ZC206X

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

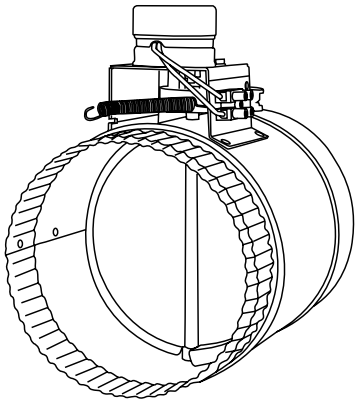

Model: ZC206X

6” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees
U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

6” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC206X	2.18 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022622	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022620	9.00	17.75	17.00	12.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZC206X

SUNCOURT®


ZONE MASTER™
AUTOMATED AIRFLOW CONTROL


NORMALLY CLOSED 8” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY
3 YEAR WARRANTY

N.T.S.

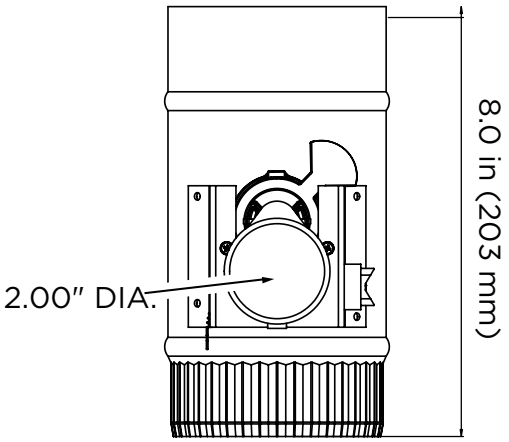

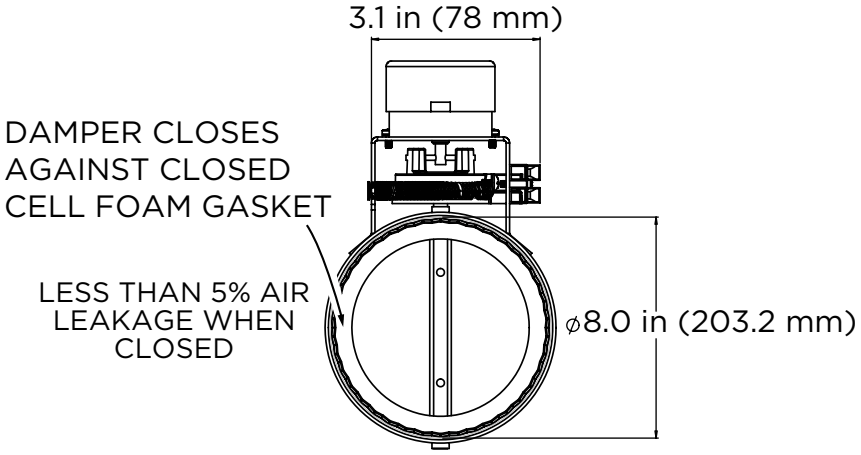

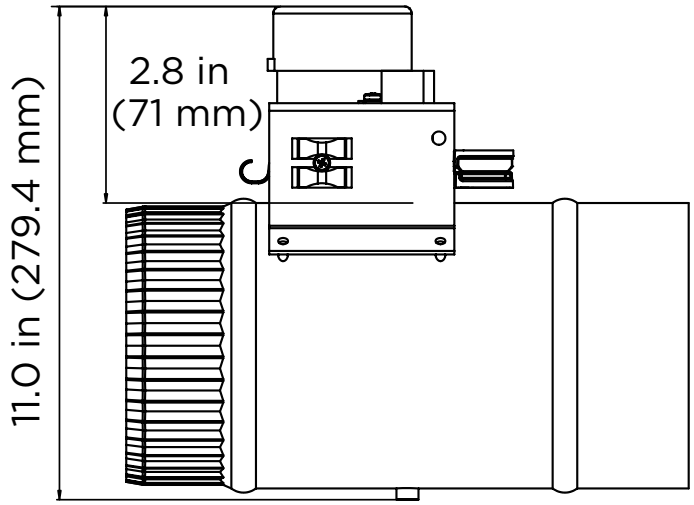

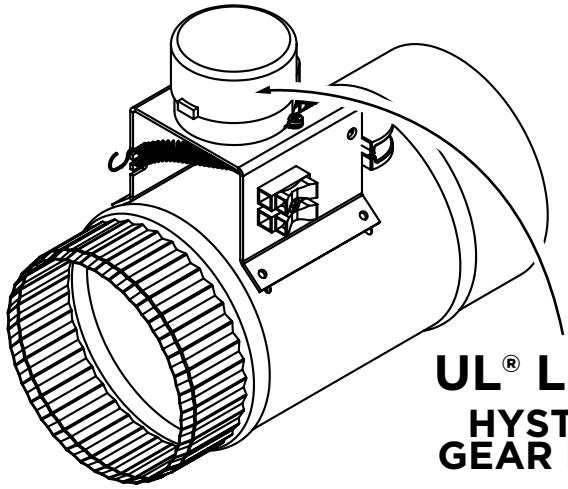

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC208

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

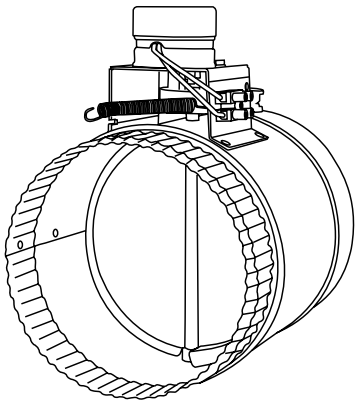

Model: ZC208

8” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

8” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC208	3.15 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022080	8.375	10.75	8.375	4.00
Master Case (4 qty):	40066028022088	17.25	11.50	17.25	18.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZC208

SUNCOURT®


ZONE MASTER™
AUTOMATED AIRFLOW CONTROL


NORMALLY CLOSED 8” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY
3 YEAR WARRANTY

N.T.S.

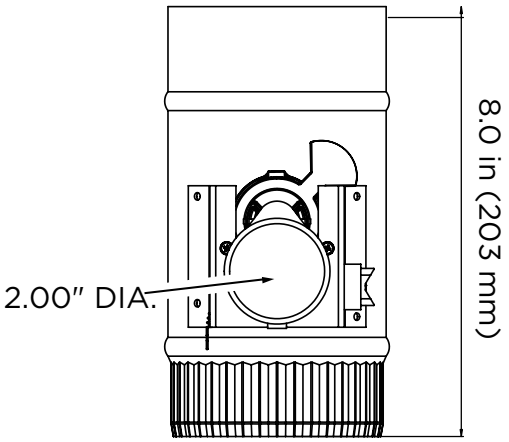

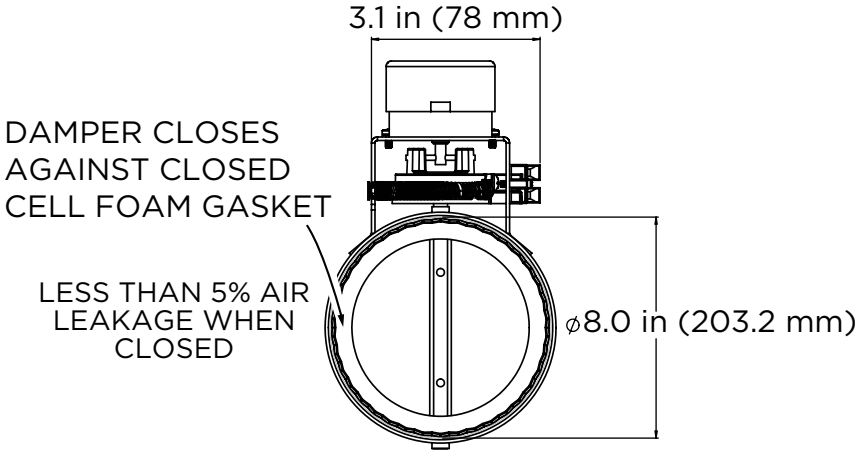

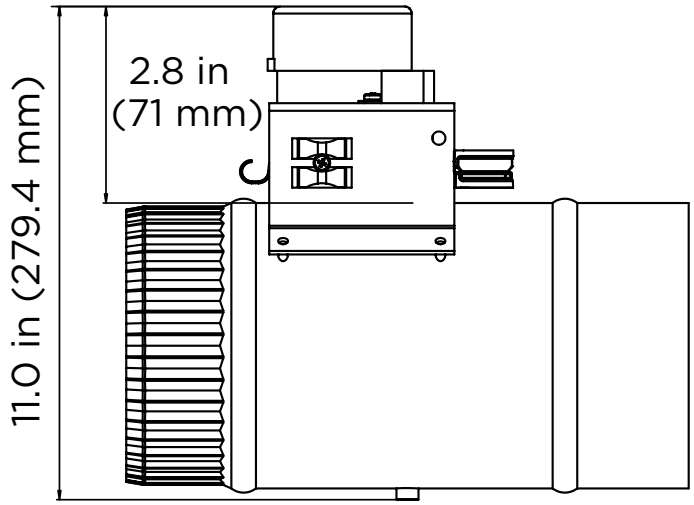


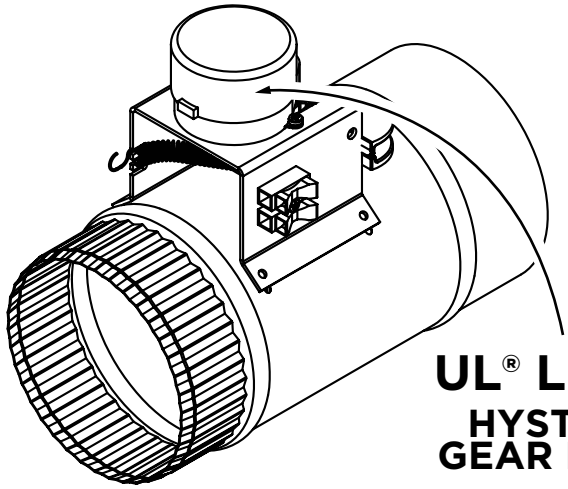

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC208S

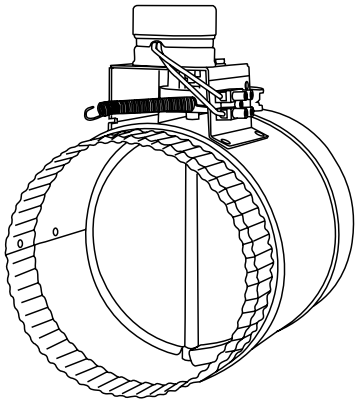

Model: ZC208S

8” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

8” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC208S	3.15 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022813	8.375	10.75	8.375	4.00
Master Case (4 qty):	40066028022811	17.25	11.50	17.25	18.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC208S


NORMALLY CLOSED 8” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY

N.T.S.

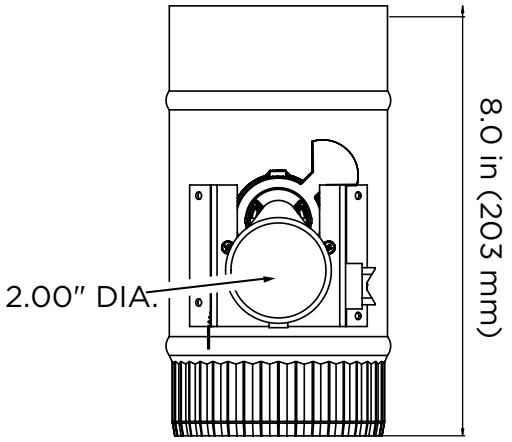

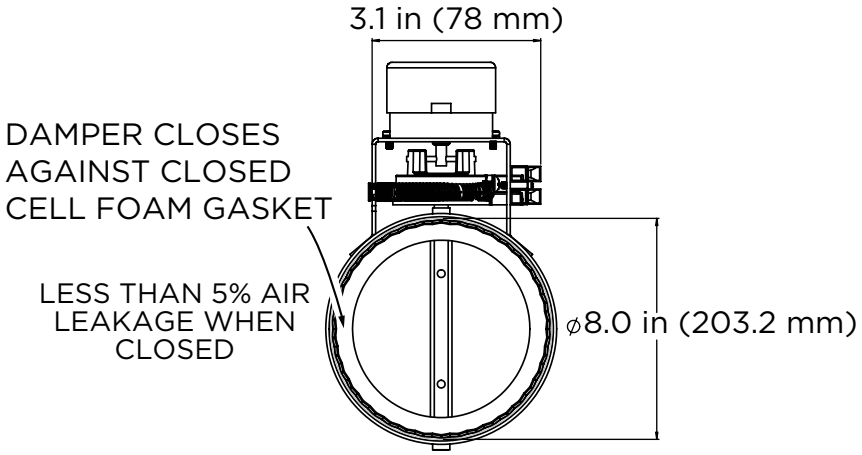

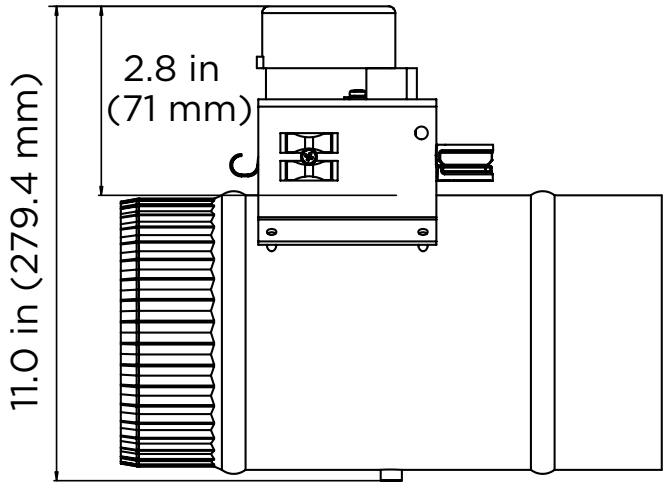

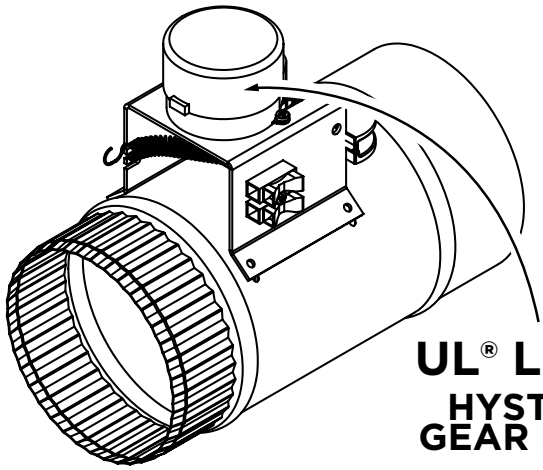

2 WIRE

UL® LISTED


HYSTERESIS GEAR MOTOR

Mounting Hardware Included: (6) #6 Sheet metal screws

Transformer Not Included

MODEL: ZC208X

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

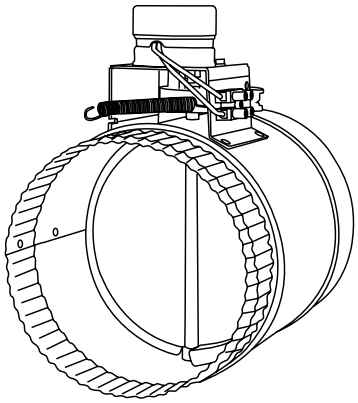

Model: ZC208X

8” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

8” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC208X	3.15 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022820	8.375	10.75	8.375	3.00
Master Case (4 qty):	40066028022828	17.25	11.50	17.25	15.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC208X


NORMALLY CLOSED 10” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

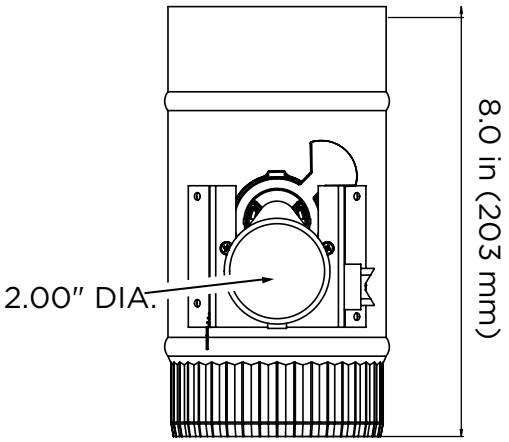

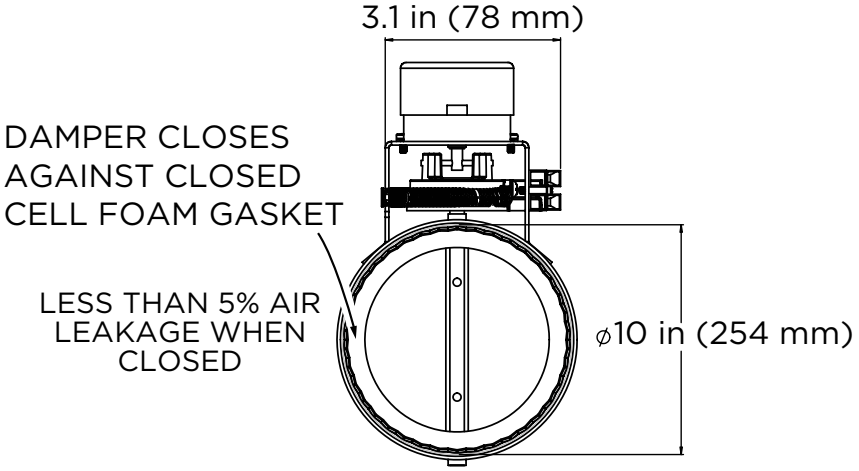

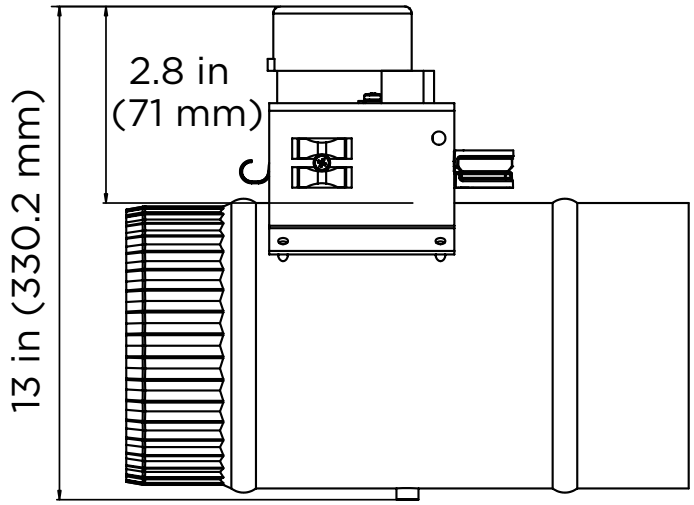

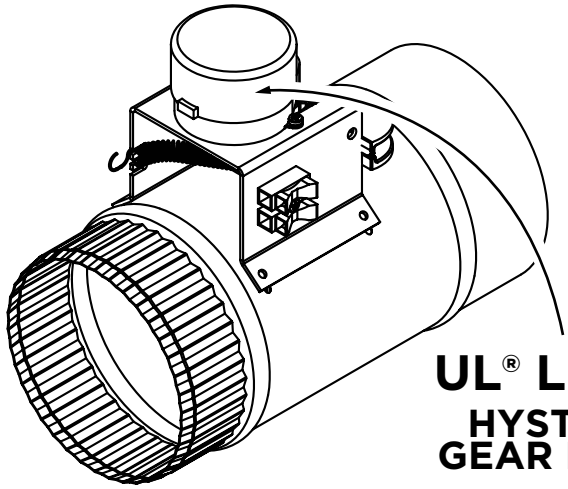

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC210

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

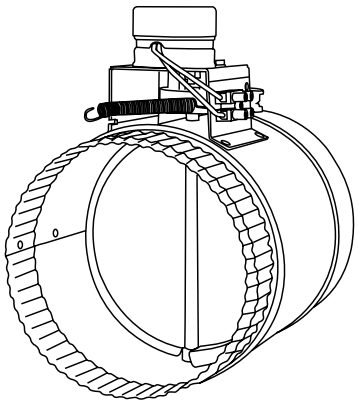

Model: ZC210

10” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

10” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC210	3.78 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022103	12.50	8.50	10.25	6.00
Master Case (2 qty):	40066028022101	13.25	14.50	17.50	12.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC210


NORMALLY CLOSED 10” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

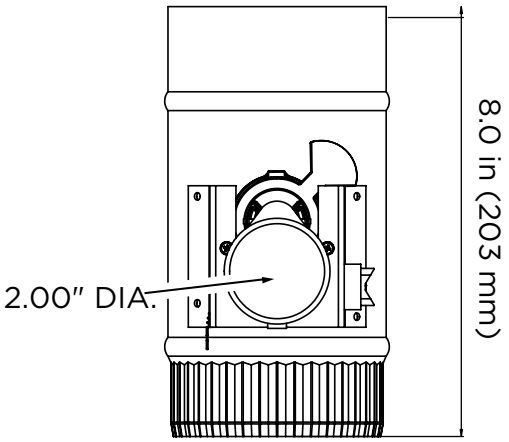

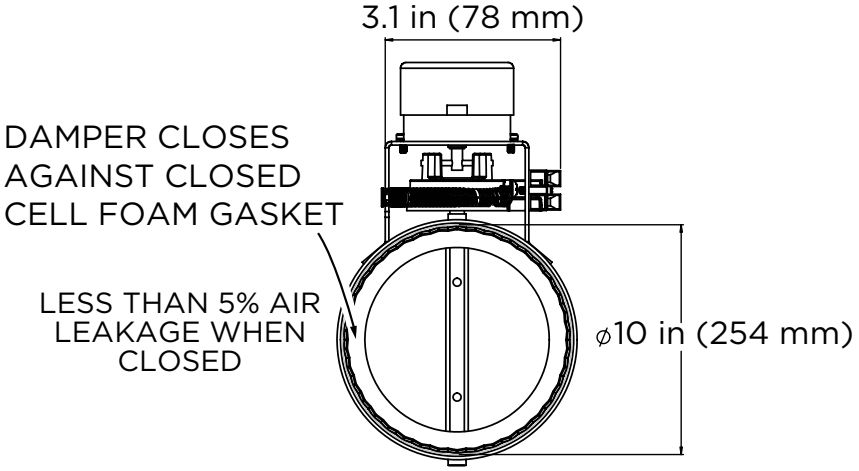

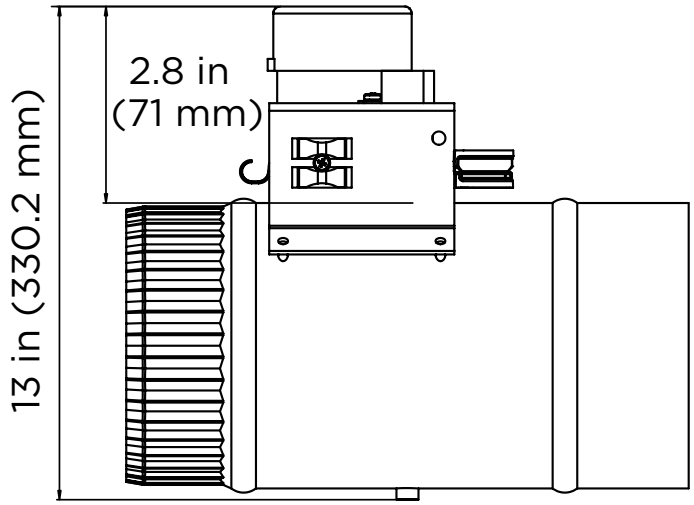

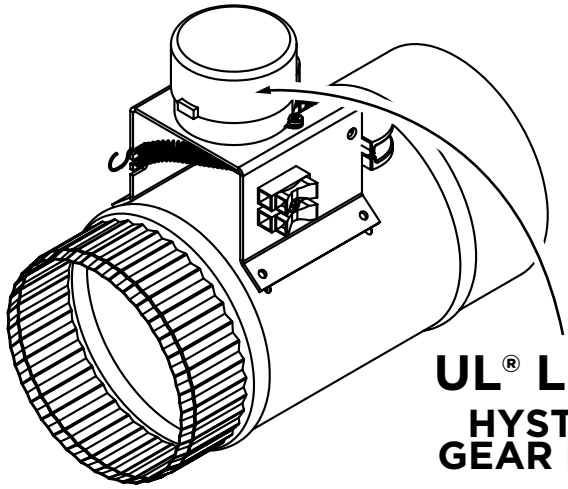


2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC210S

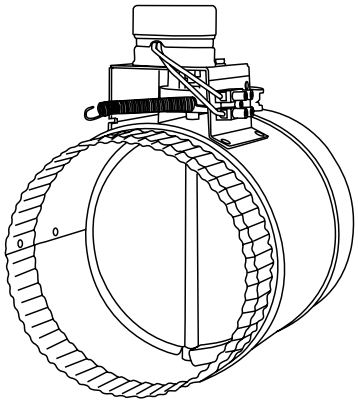

Model: ZC210S

10” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

10” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC210S	3.78 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022912	12.50	8.50	10.25	5.00
Master Case (2 qty):	40066028022910	13.25	14.50	17.50	12.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC210S


NORMALLY CLOSED 10” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY

N.T.S.

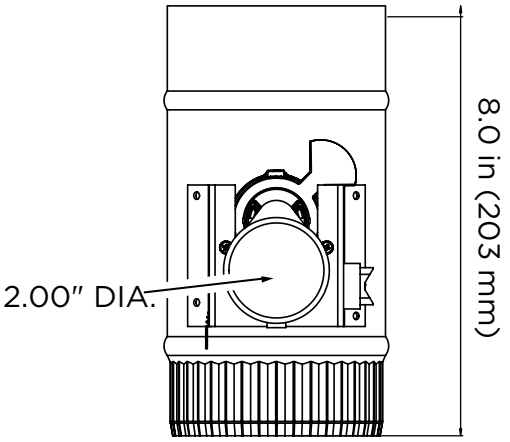

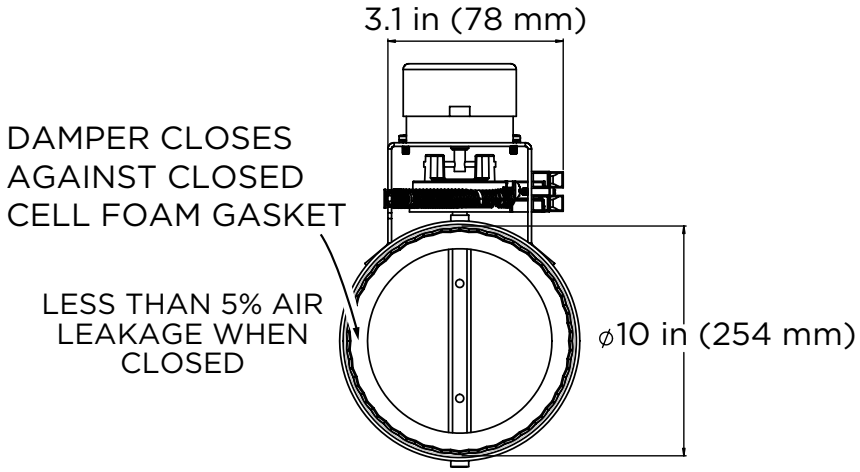

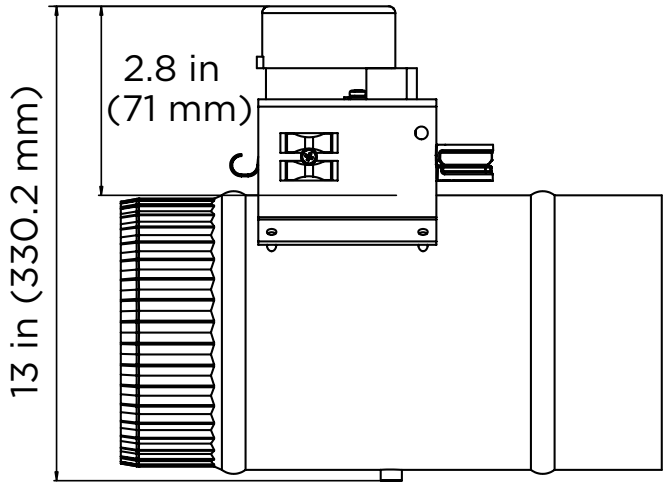

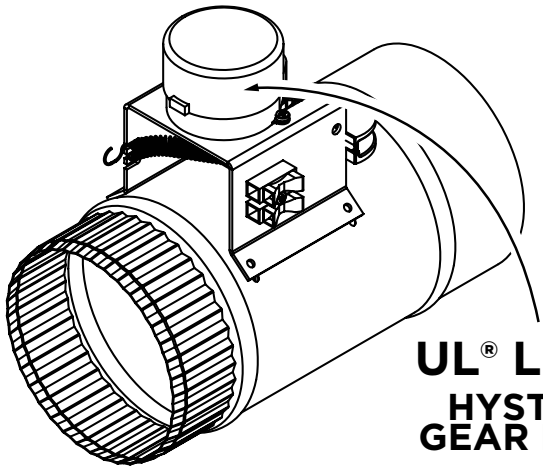

2 WIRE


UL® LISTED

HYSTERESIS GEAR MOTOR

Mounting Hardware Included: (6) #6 Sheet metal screws

Transformer Not Included

MODEL: ZC210X

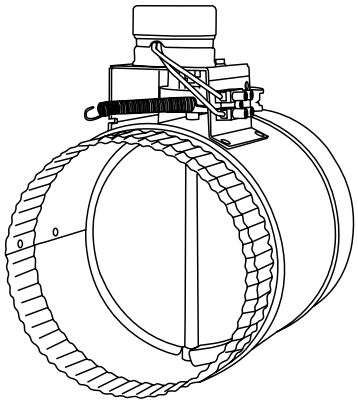

Model: ZC210X

10” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

10” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC210X	3.78 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022929	12.50	8.50	10.25	4.00
Master Case (2 qty):	40066028022927	13.25	14.50	17.50	10.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC210X


NORMALLY CLOSED 12” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

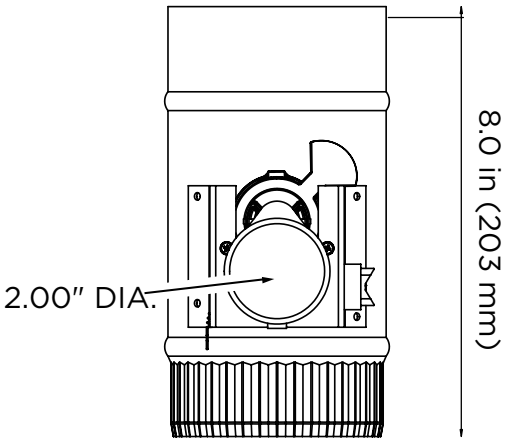

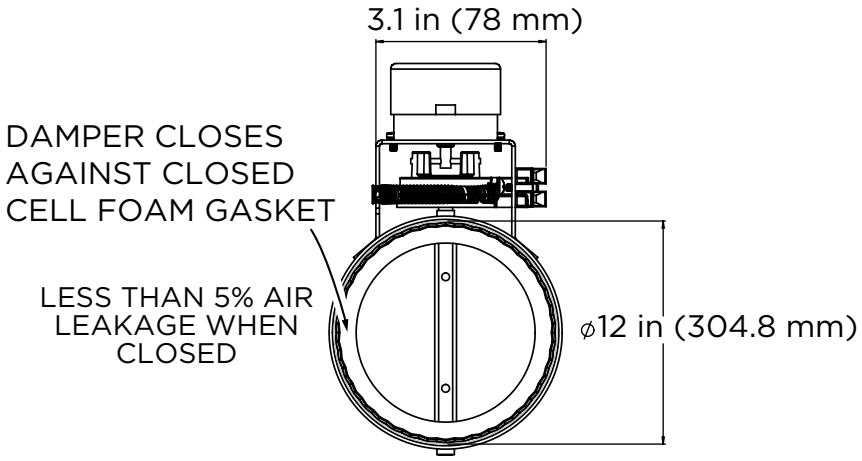

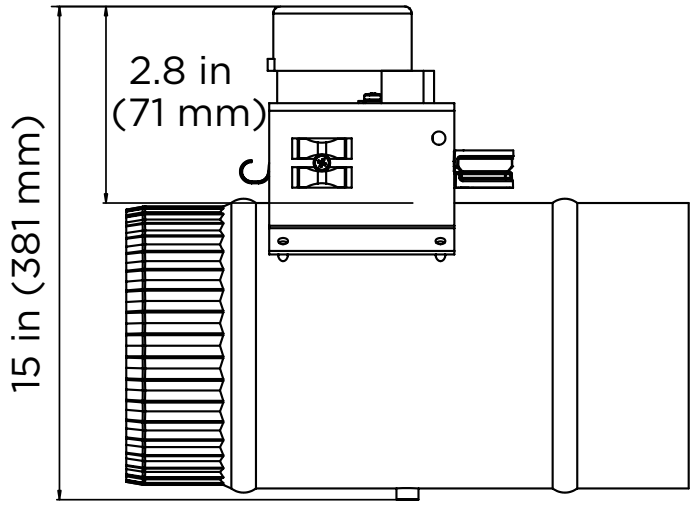

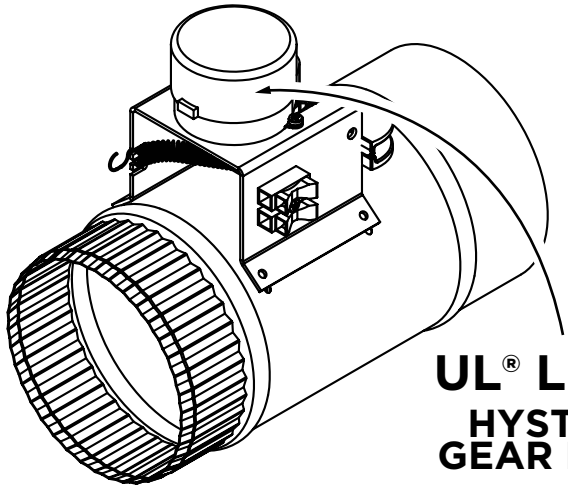


2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC212

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

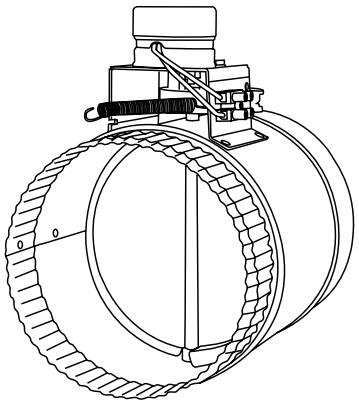

Model: ZC212

12” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

12” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC212	4.56 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022127	8.75	13.75	12.625	7.00
Master Case (2 qty):	40066028022125	13.25	14.50	17.50	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZC212


NORMALLY CLOSED 12” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

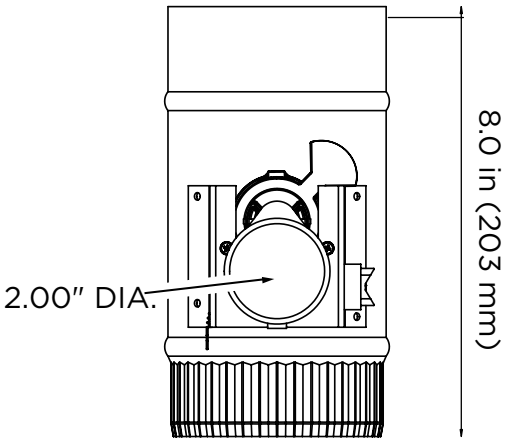

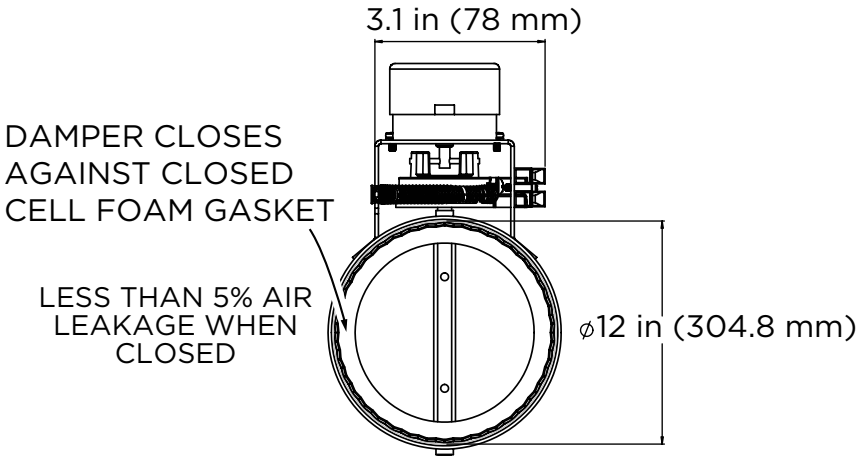

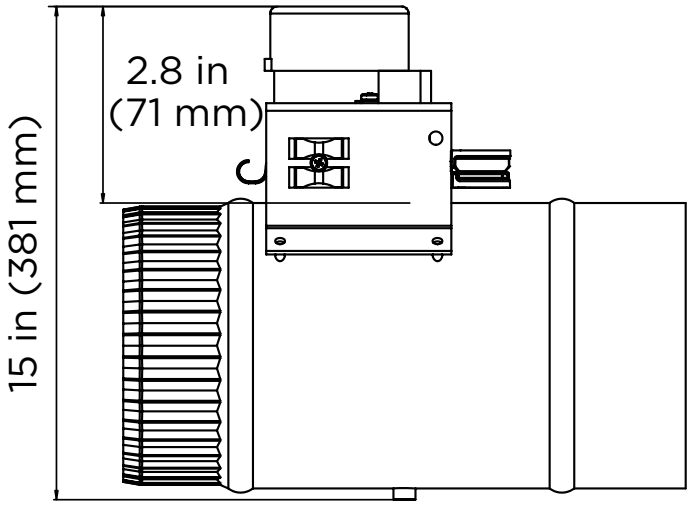

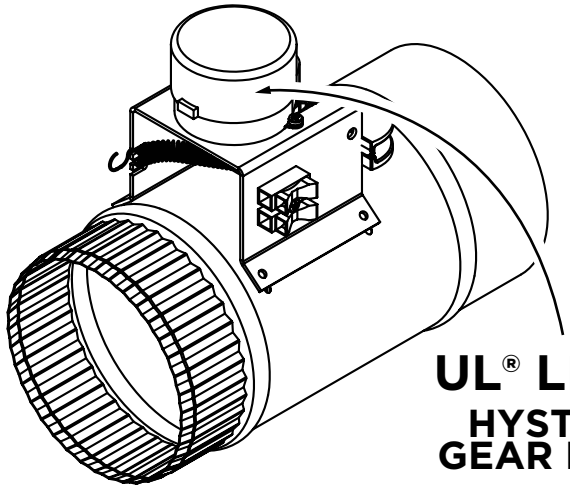


2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZC212S

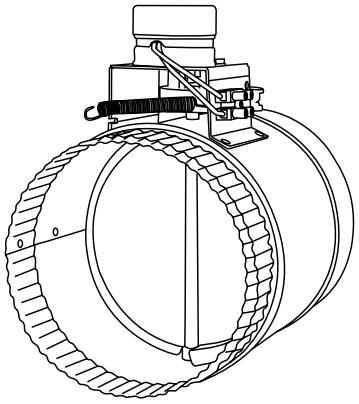

Model: ZC212S

12” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:
Input: 120 VAC, 60 Hz
Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees
U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

12” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC212S	4.56 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022219	8.75	13.75	12.625	6.00
Master Case (2 qty):	40066028022217	13.25	14.50	17.50	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZC212S


NORMALLY CLOSED 12” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY


3 YEAR WARRANTY

N.T.S.

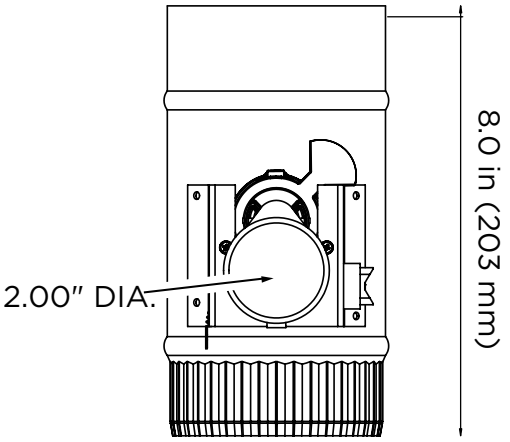

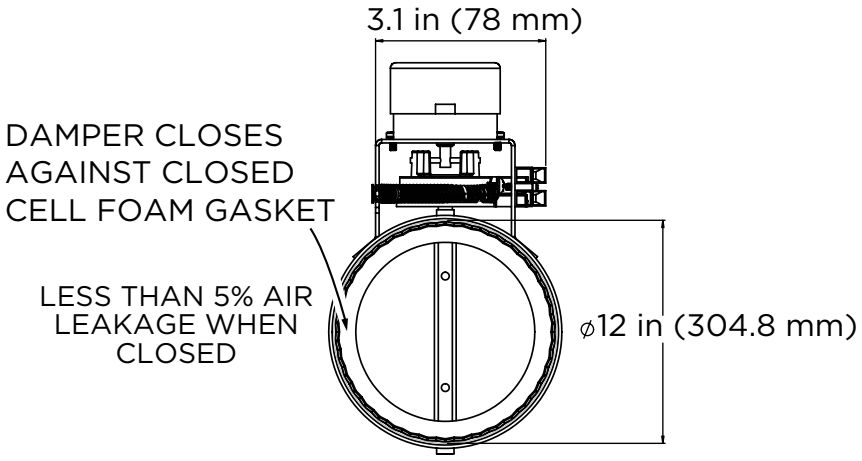

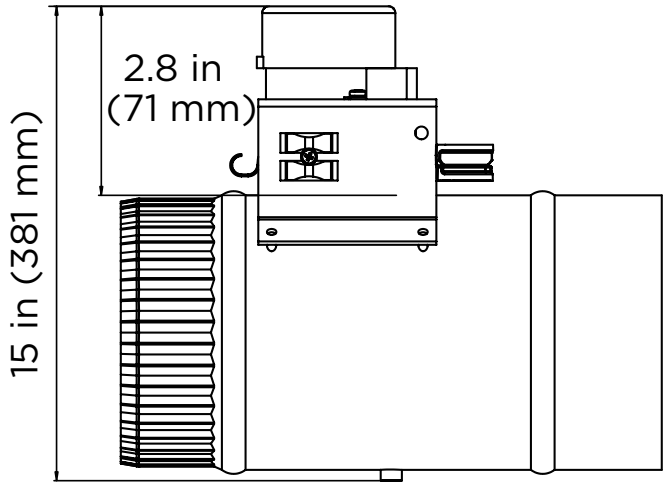

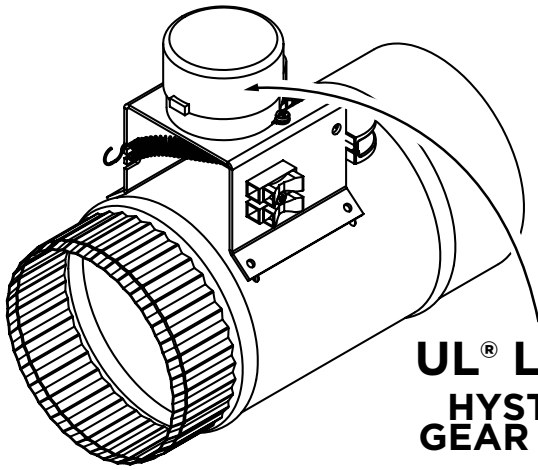

2 WIRE

UL® LISTED


HYSTERESIS GEAR MOTOR

Mounting Hardware Included: (6) #6 Sheet metal screws

Transformer Not Included

MODEL: ZC212X

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

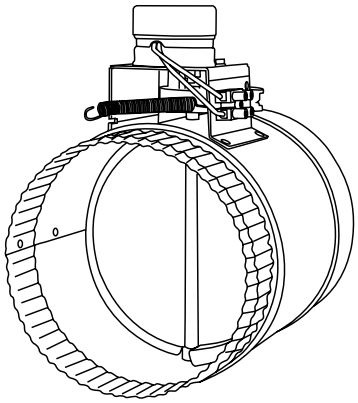

Model: ZC212X

12” ZoneMaster™ Motorized Damper - Normally Closed, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

12” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZC212X	4.56 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022226	8.75	13.75	12.625	5.00
Master Case (2 qty):	40066028022224	13.25	14.50	17.50	12.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZC212X