

NORMALLY OPEN 4” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

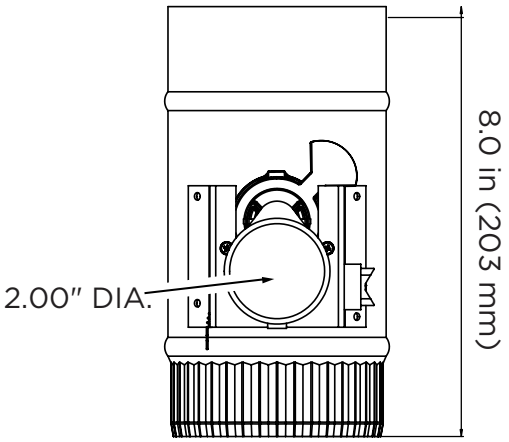

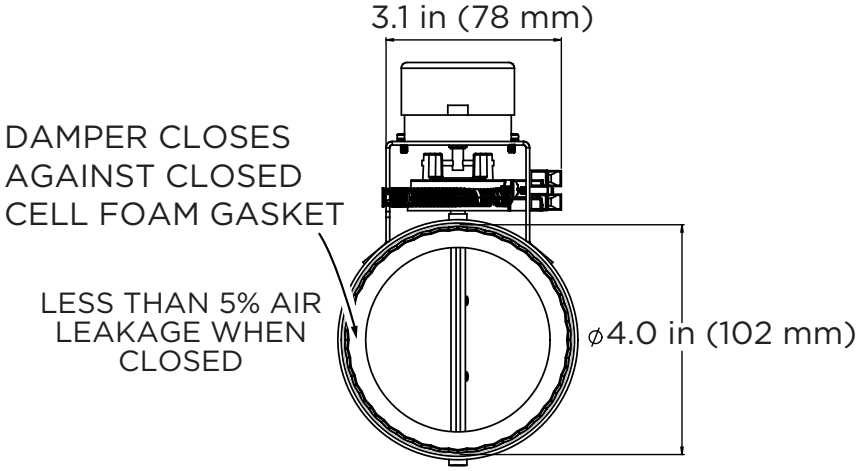

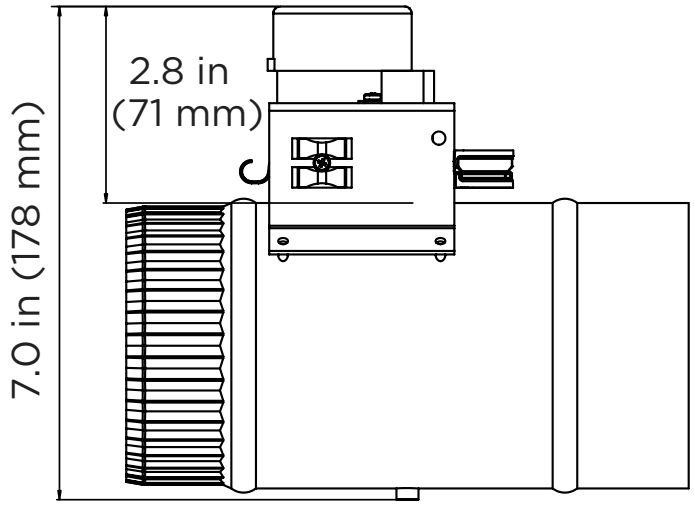

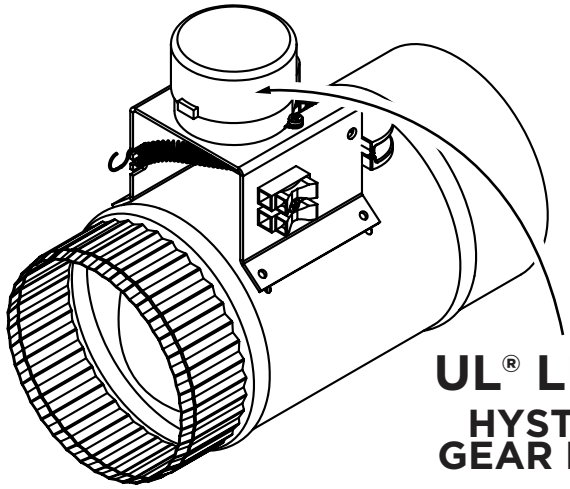

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO204

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

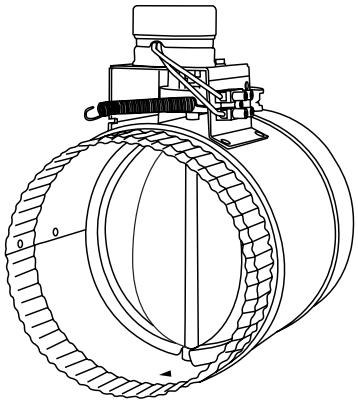

Model: ZO204

4” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

4” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO204	1.70 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022448	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022446	9.00	17.75	17.00	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZO204


NORMALLY OPEN 4” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

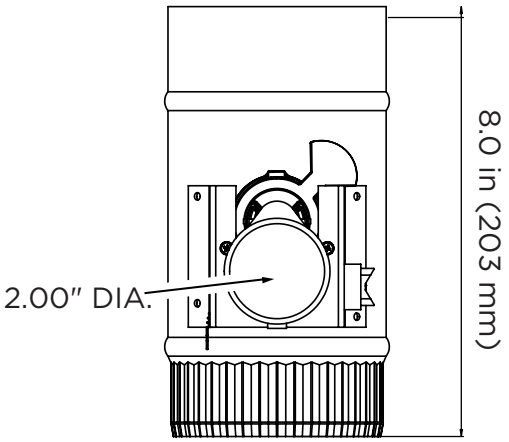

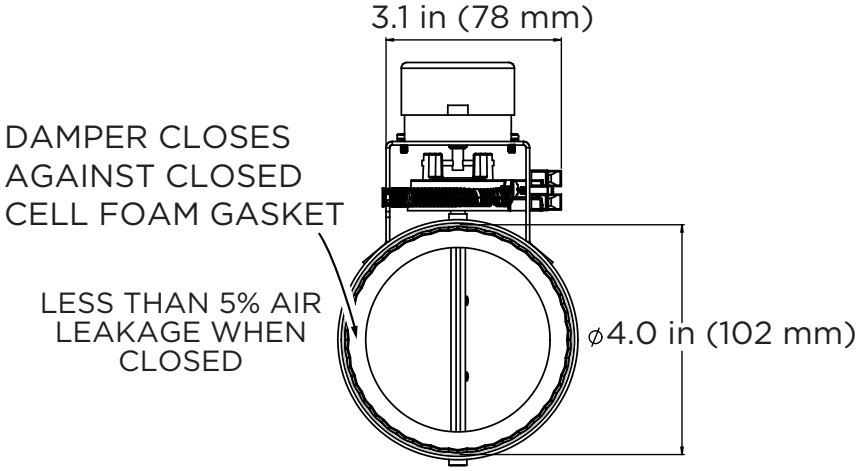

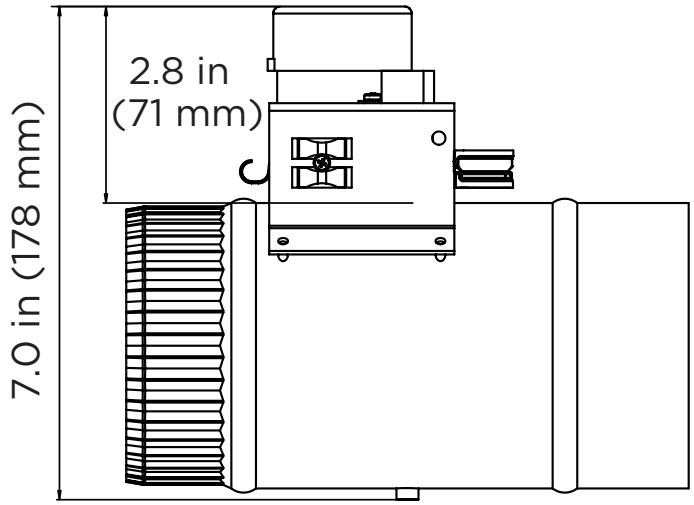


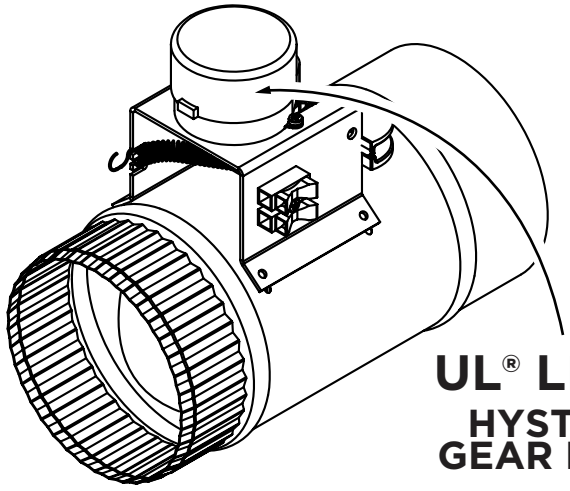

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO204S

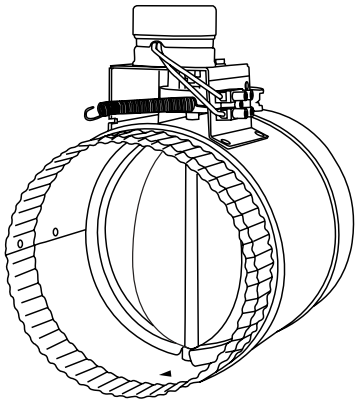

Model: ZO204S

4” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

4” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO204S	1.70 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022417	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022415	9.00	17.75	17.00	13.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZO204S


NORMALLY OPEN 5” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY


3 YEAR WARRANTY

N.T.S.

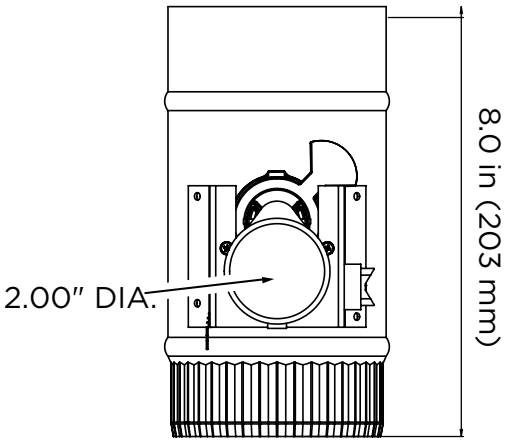

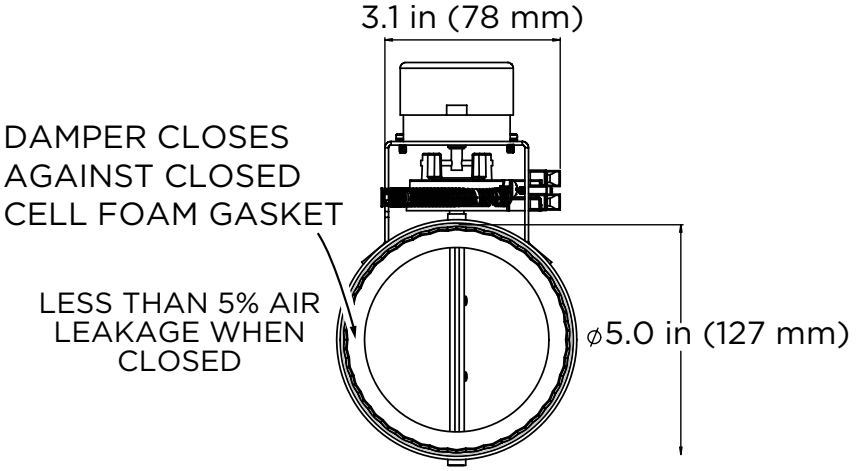

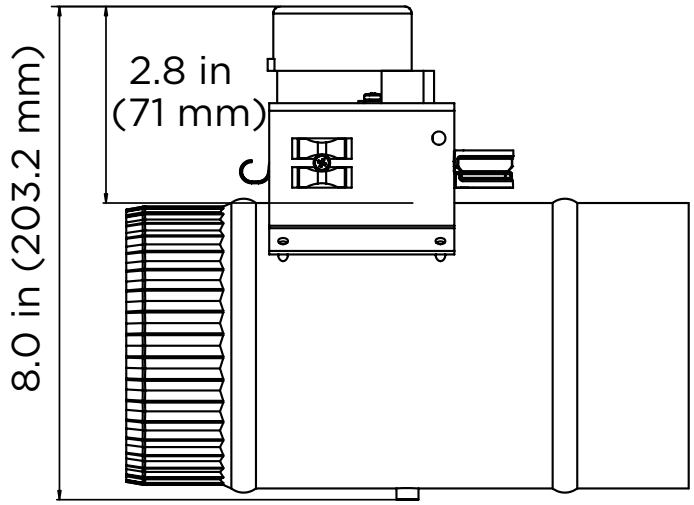

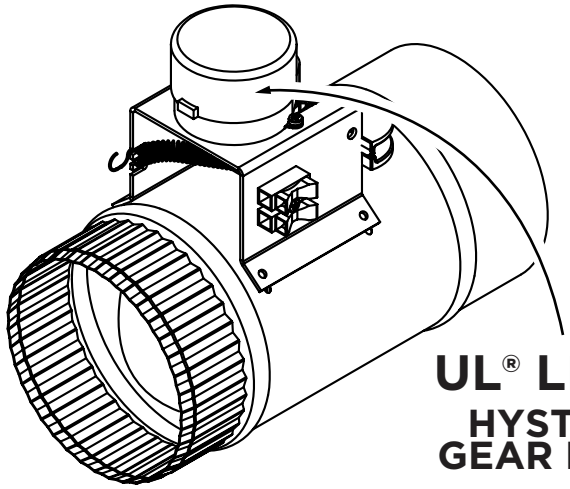

2 WIRE

UL® LISTED

HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO205

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

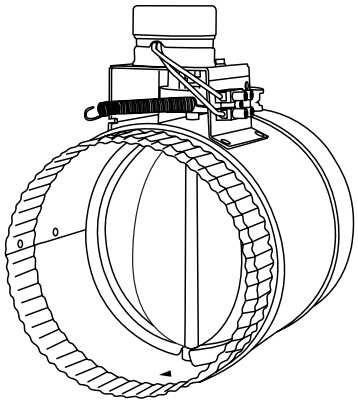

Model: ZO205

5” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

5” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO205	1.94 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022554	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022552	9.00	17.75	17.00	15.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZO205


NORMALLY OPEN 5” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

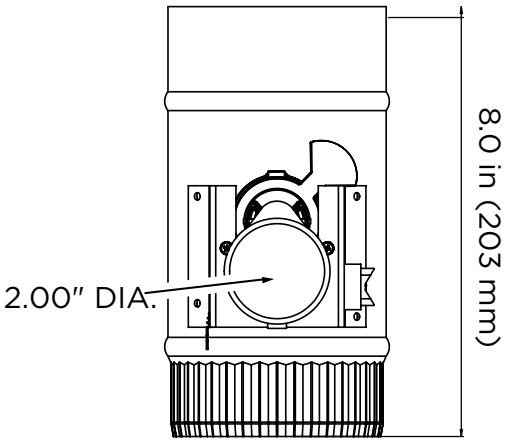

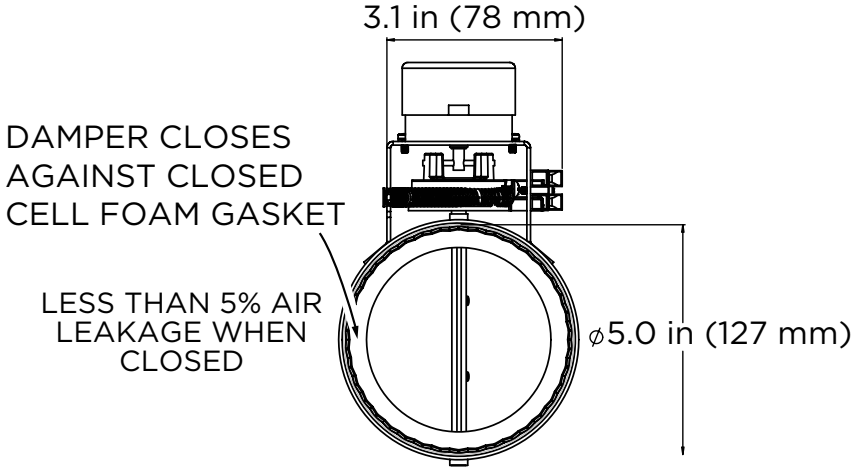

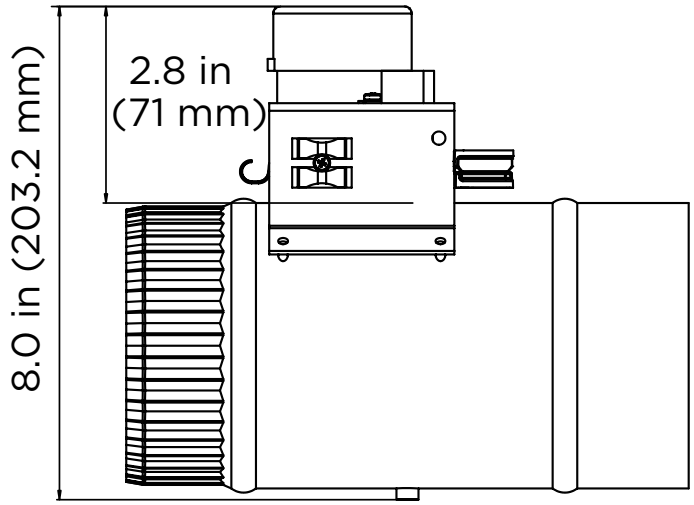


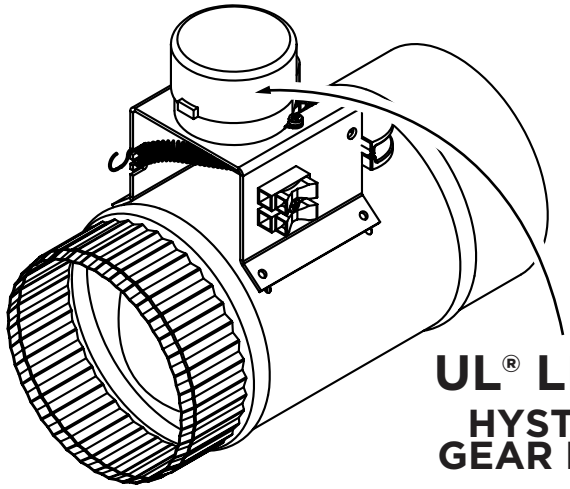

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz

Dimensions:
2.25 in L × 2 in W × 2.5 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO205S

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

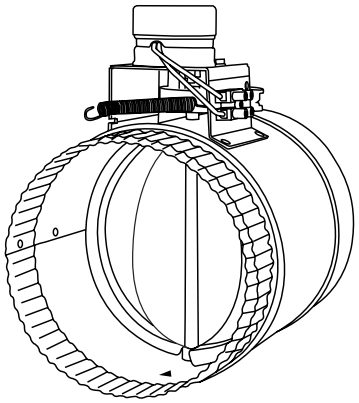

Model: ZO205S

5” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

5” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO205S	1.94 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022561	8.375	8.50	8.375	3.00
Master Case (4 qty):	40066028022569	9.00	17.75	17.00	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZO205S


NORMALLY OPEN 6” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY


3 YEAR WARRANTY

N.T.S.

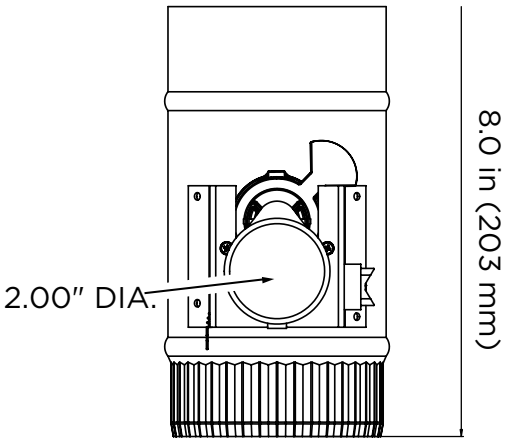

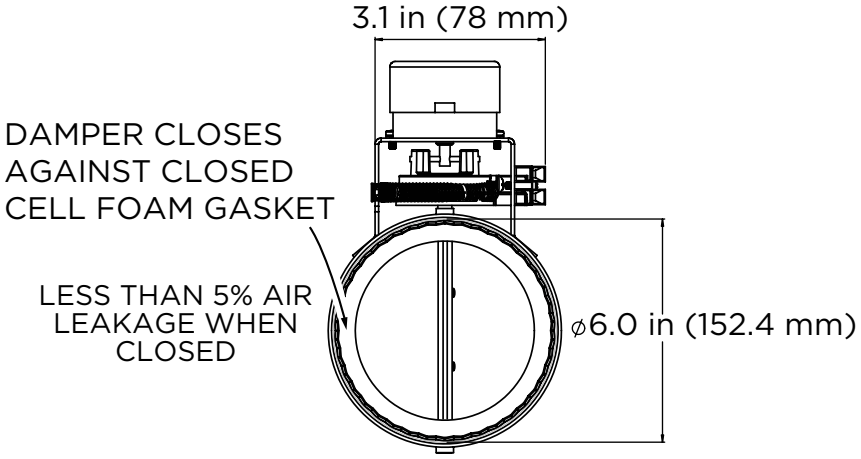

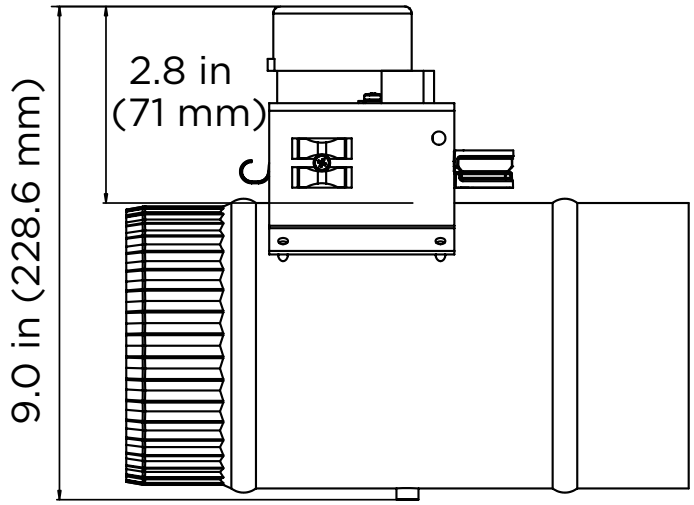

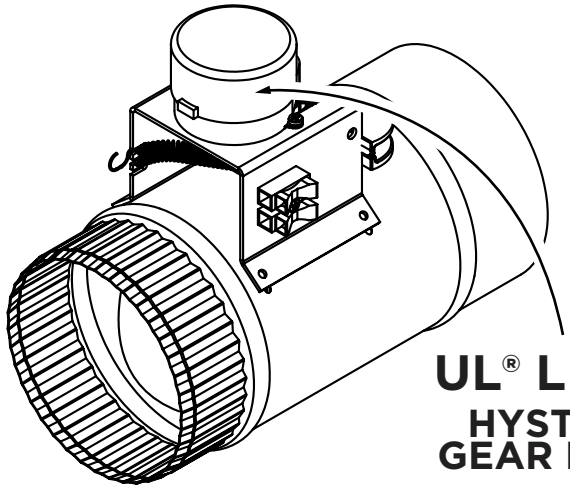


2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO206

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

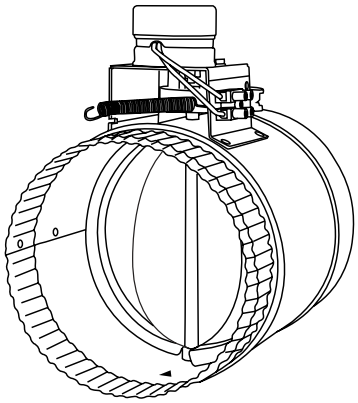

Model: ZO206

6” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

6” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO206	2.18 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022141	8.375	8.50	8.375	4.00
Master Case (4 qty):	40066028022149	9.00	17.75	17.00	16.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:


Not Applicable


NORMALLY OPEN 6” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

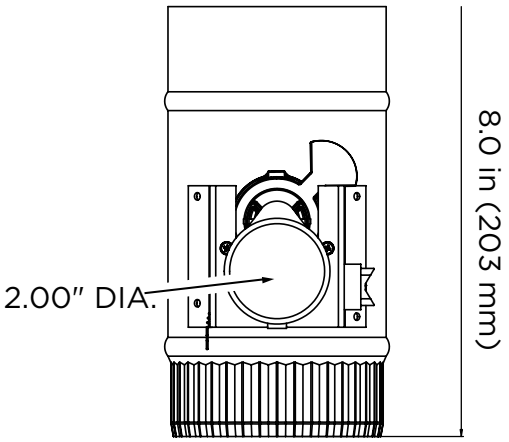

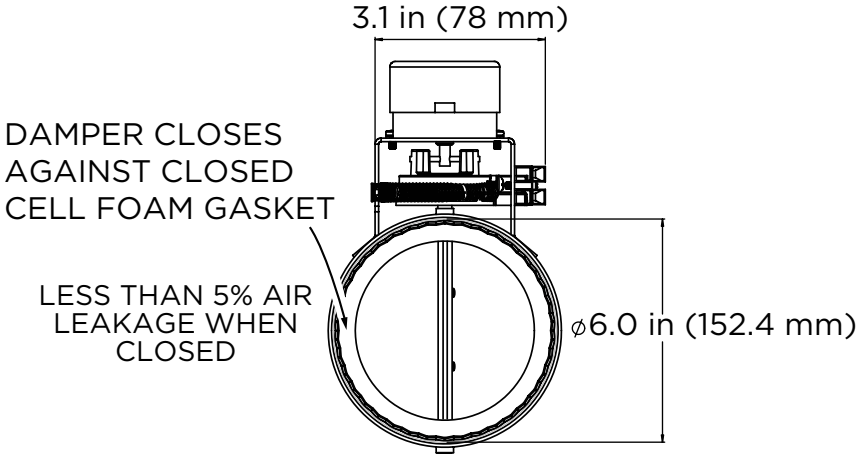

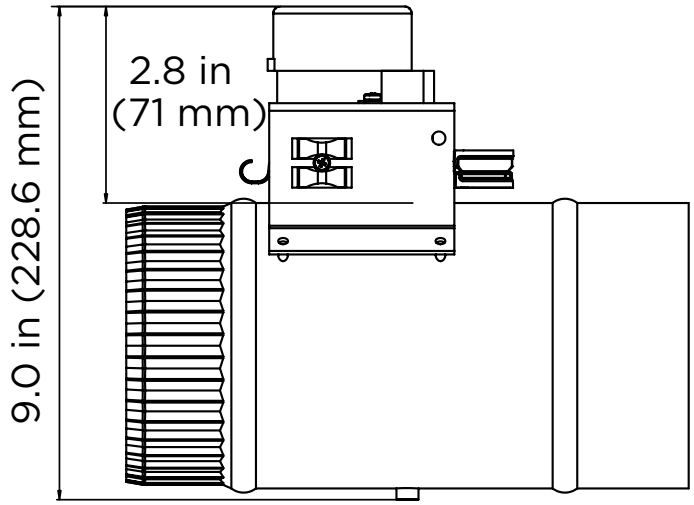


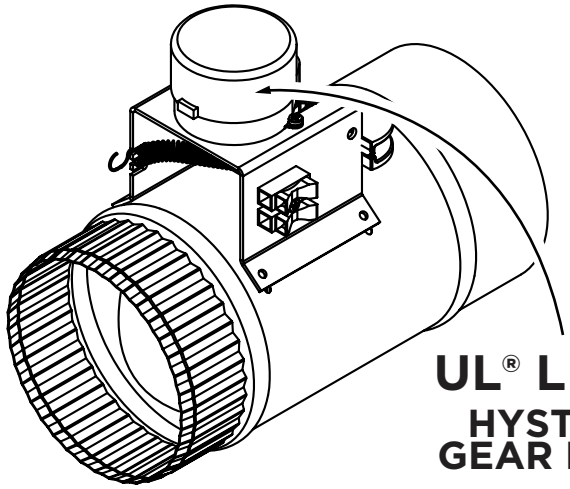

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO206S

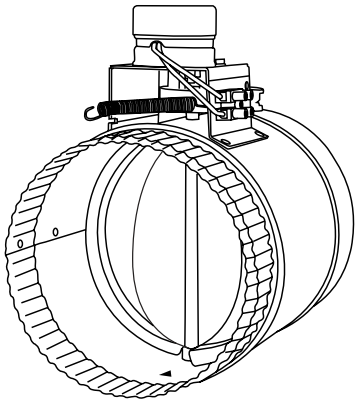

Model: ZO206S

6” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

6” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO206S	2.18 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022677	8.375	8.50	8.375	4.00
Master Case (4 qty):	40066028022675	9.00	17.75	17.00	16.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:


Not Applicable


NORMALLY OPEN 8” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

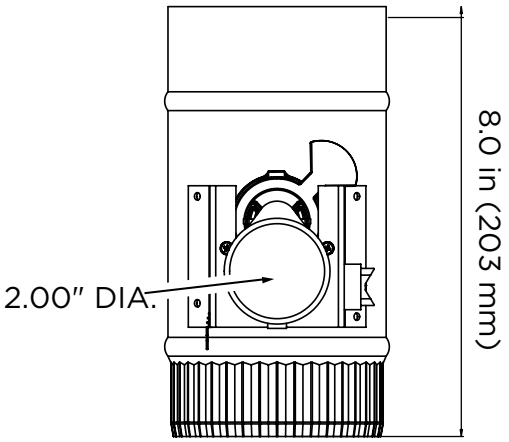

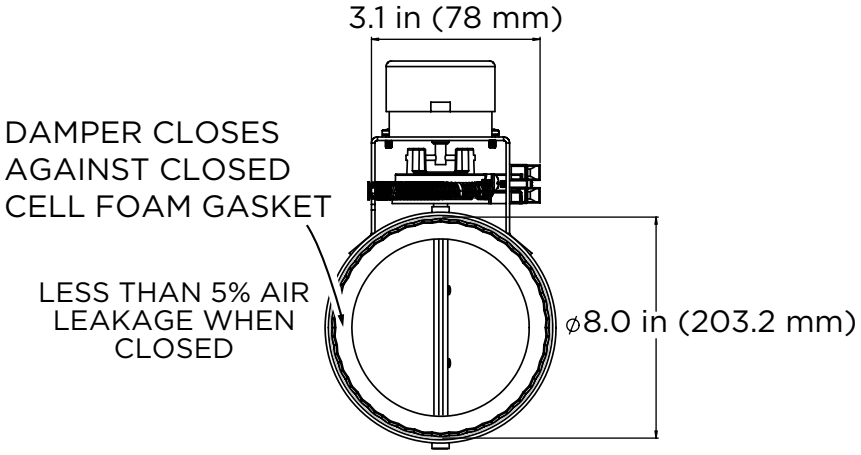

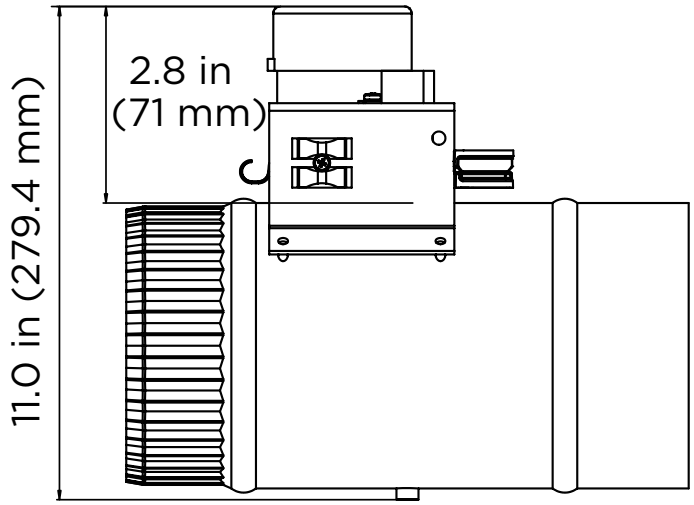

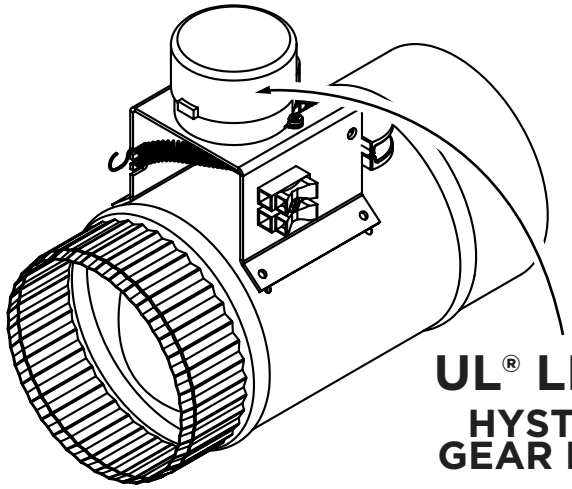

2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz


Dimensions:
2 in L × 2.25 in W × 3.75 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO208

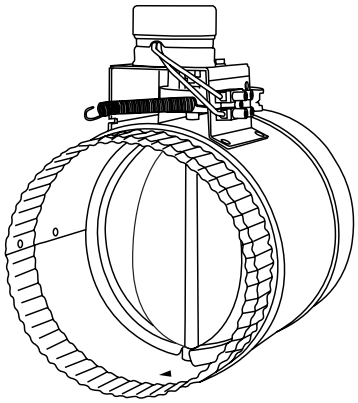

Model: ZO208

8” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

8” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO208	3.15 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022165	8.375	10.75	8.375	4.00
Master Case (4 qty):	40066028022163	17.25	11.50	17.25	18.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZO208


NORMALLY OPEN 8” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

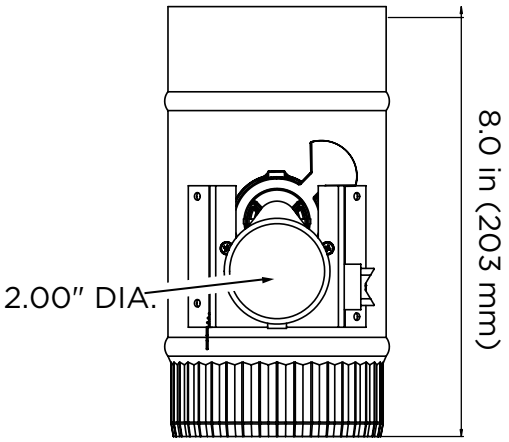

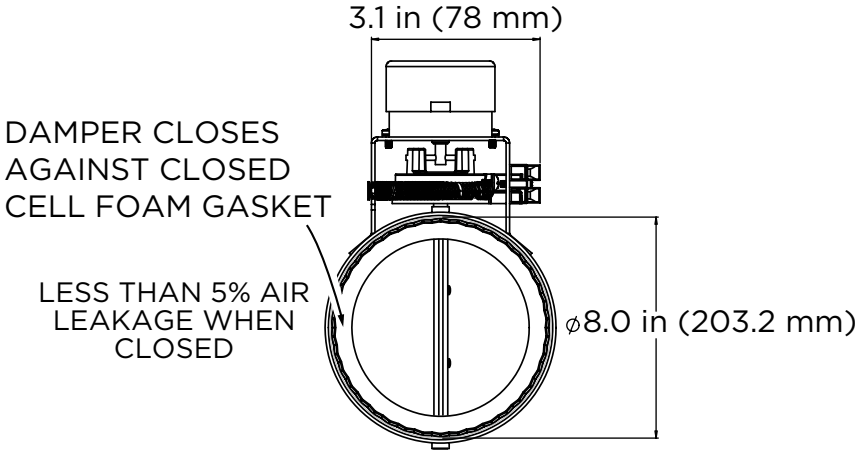

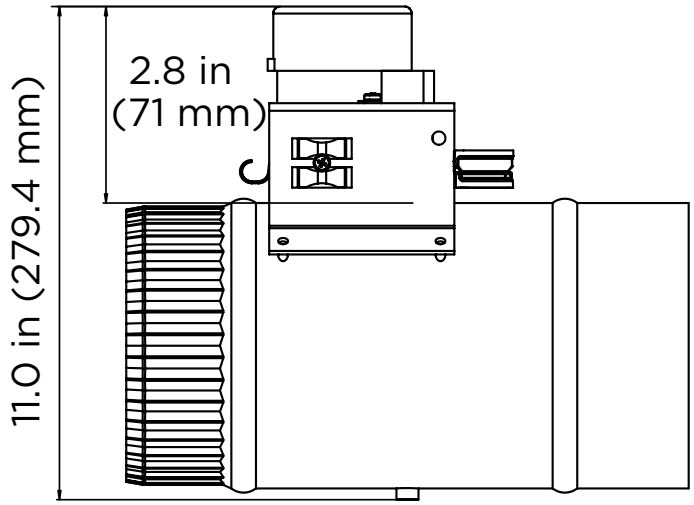


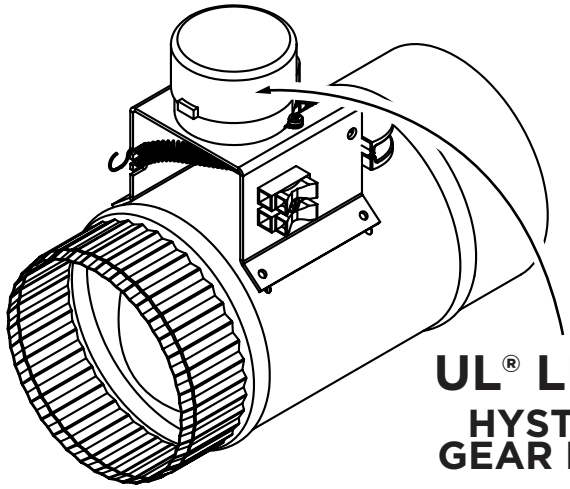

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO208S

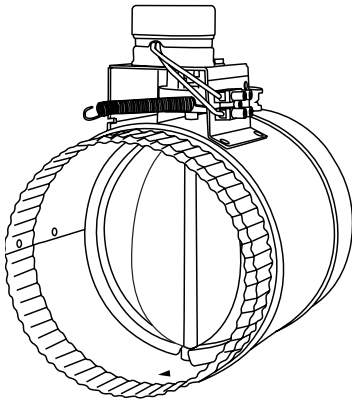

Model: ZO208S

8” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

8” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 4

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO208S	3.15 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022806	8.375	10.75	8.375	4.00
Master Case (4 qty):	40066028022804	17.25	11.50	17.25	18.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZO208S


NORMALLY OPEN 10” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

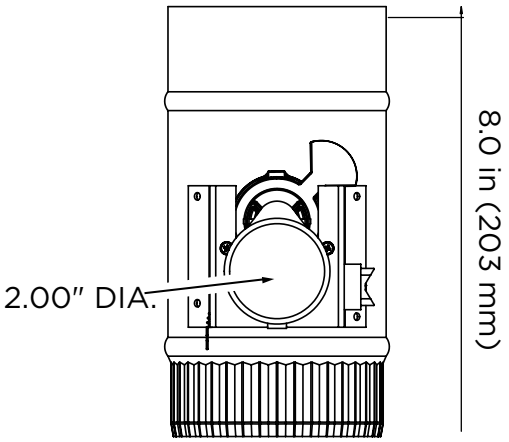

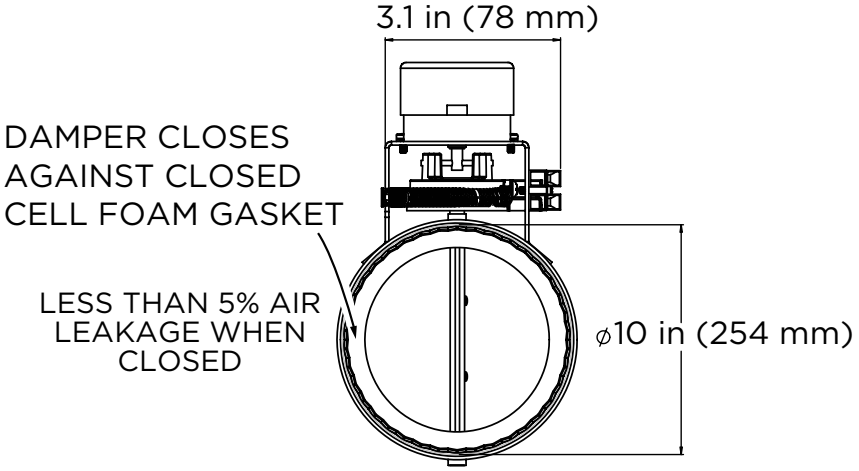

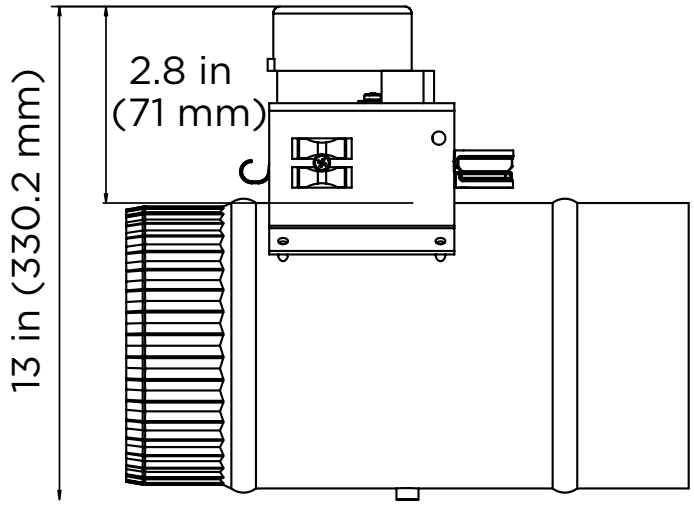

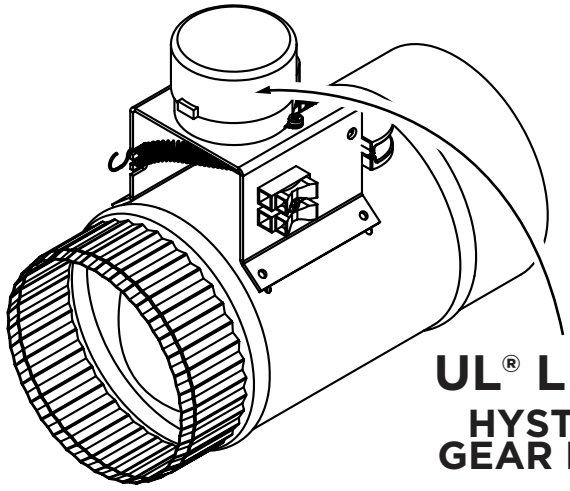

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO210

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

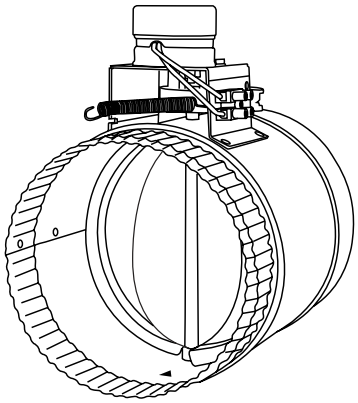

Model: ZO210

10” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

10” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO210	3.78 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022189	12.50	8.50	10.25	6.00
Master Case (2 qty):	40066028022187	13.25	14.50	17.50	12.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:


Not Applicable


NORMALLY OPEN 10” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

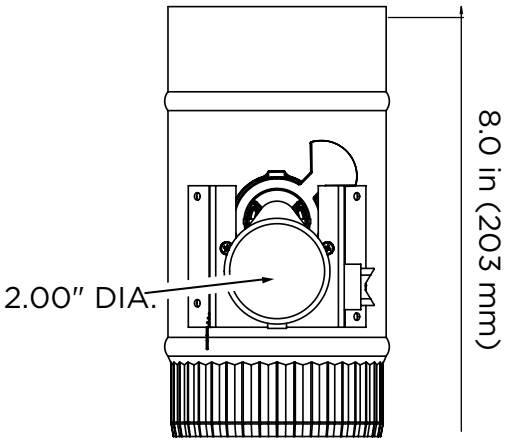

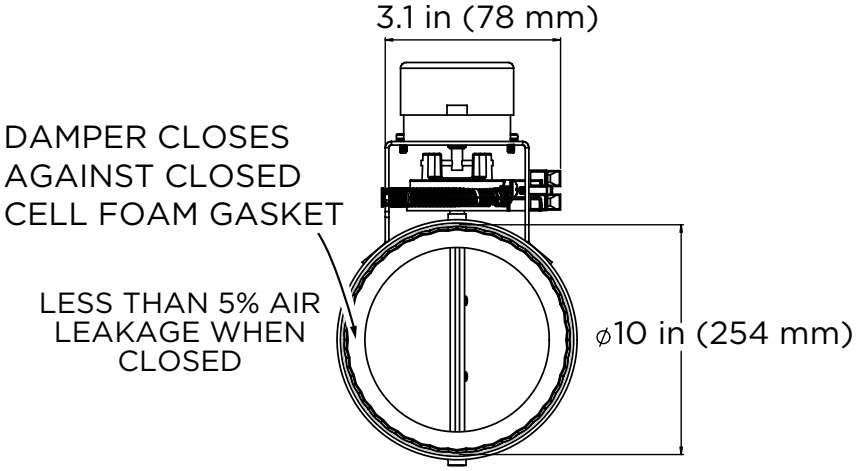

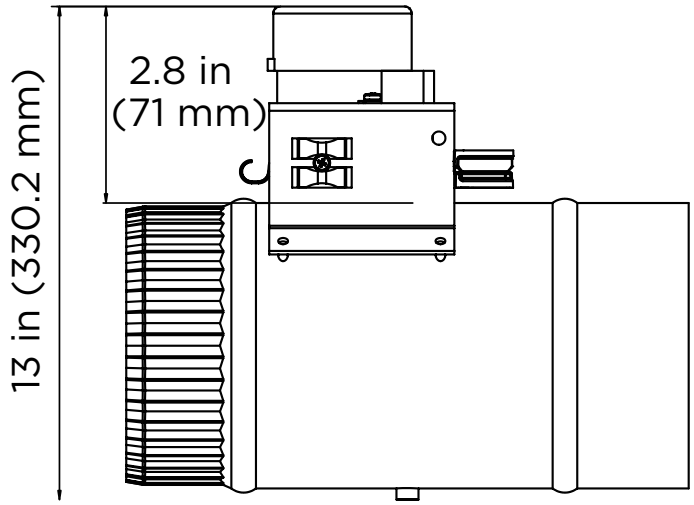

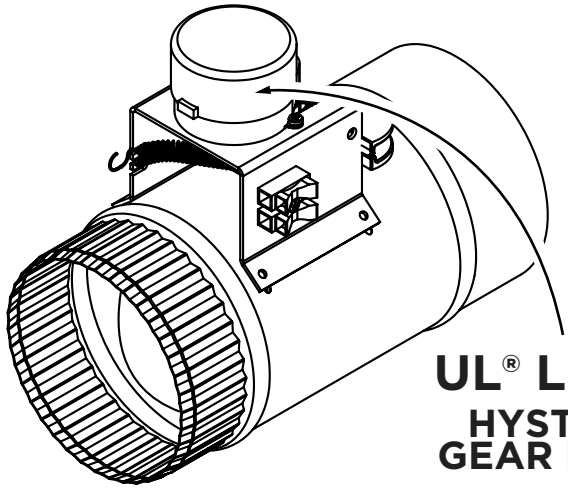


2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz

Dimensions:
2.25 in L × 2 in W × 2.5 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO210S

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | suncourt.com

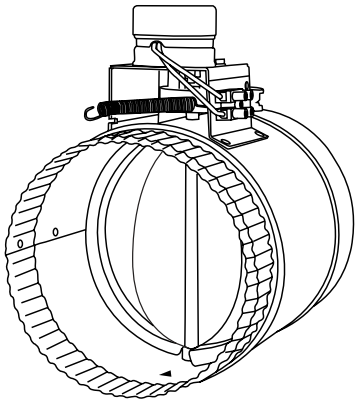

Model: ZO210S

10” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

10” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO210S	3.78 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022882	12.50	8.50	10.25	5.00
Master Case (2 qty):	40066028022880	13.25	14.50	17.50	12.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZO210S


NORMALLY OPEN 12” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

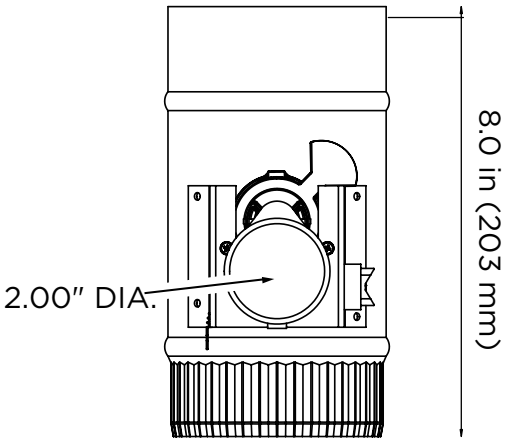

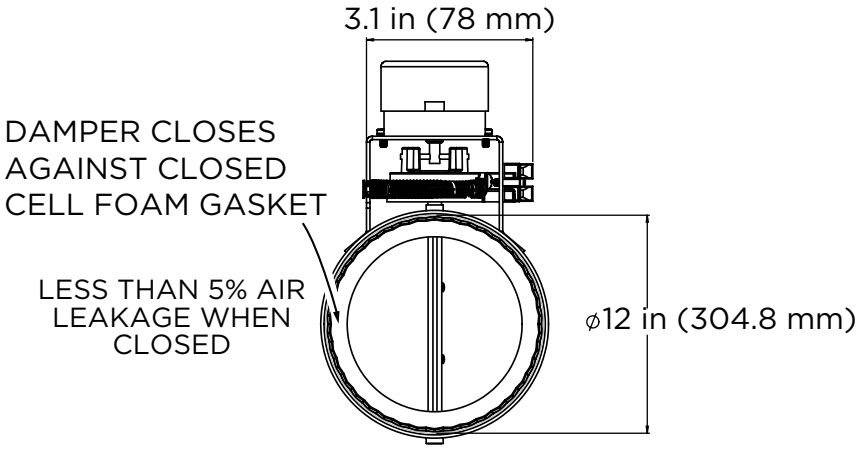

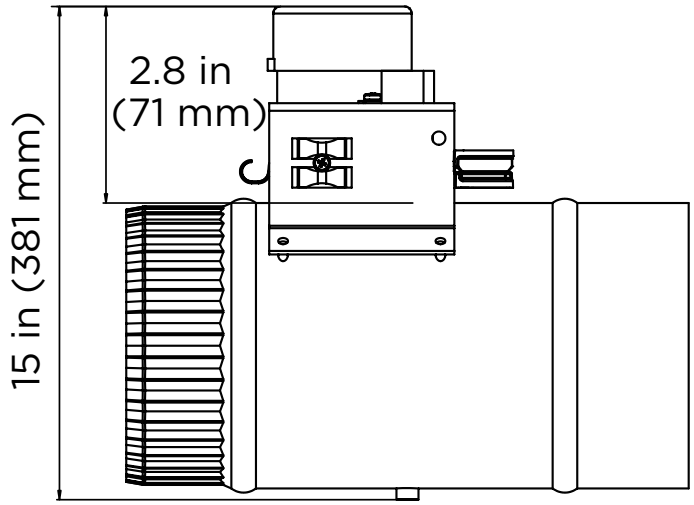

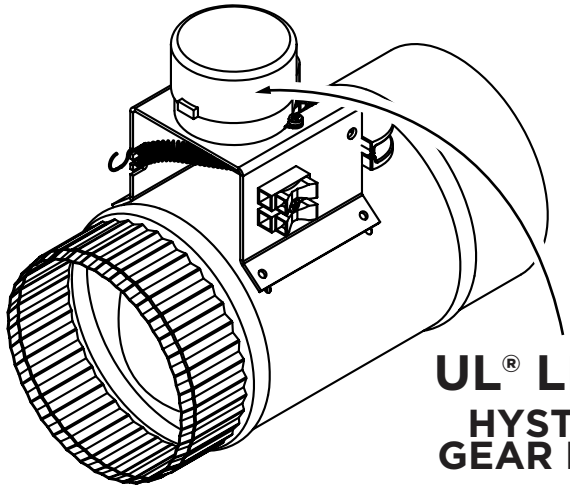

2 WIRE

UL® LISTED HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Plug-In Transformer



Unit Weight: 15 oz

Dimensions:
2 in L × 2.25 in W × 3.75 in H


Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO212

SUNCOURT INC. | P.O. Box 40 | Durant, IA 52747-0040 | 1.800.999.FANS (3267) | **suncourt.com**

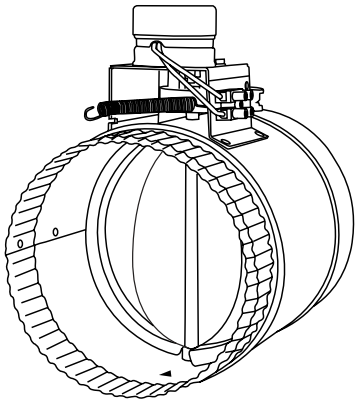

Model: ZO212

12” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Plug-In Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 20 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

12” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO212	4.56 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022202	8.75	13.75	12.625	7.00
Master Case (2 qty):	40066028022200	13.25	14.50	17.50	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable


MODEL: ZO212


NORMALLY OPEN 12” 24V HVAC MOTORIZED DAMPER


ENGINEERED & ASSEMBLED IN USA


3 YEAR LIMITED WARRANTY — 3 YEAR WARRANTY

N.T.S.

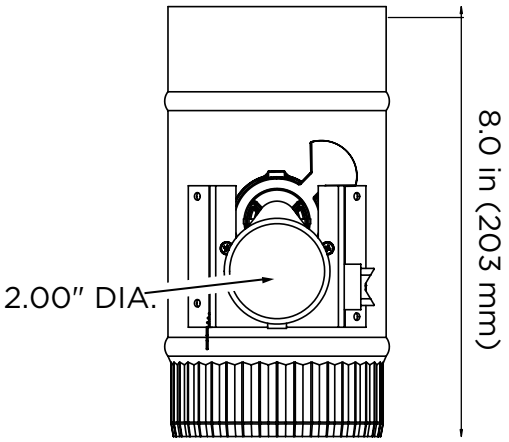

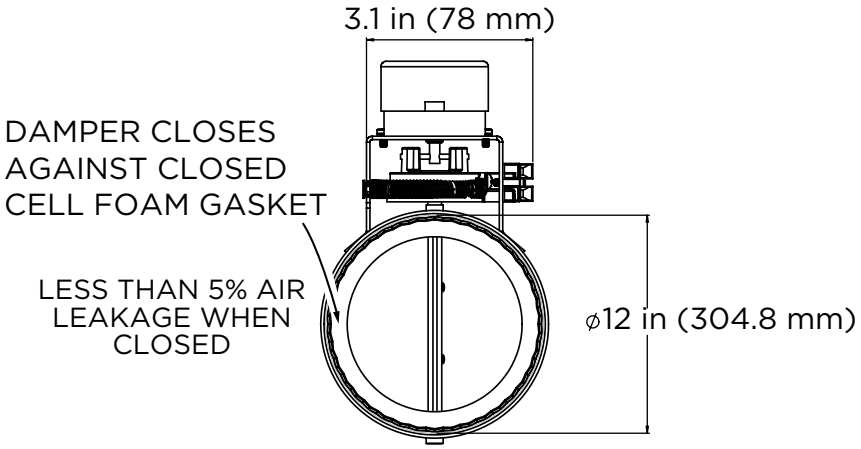

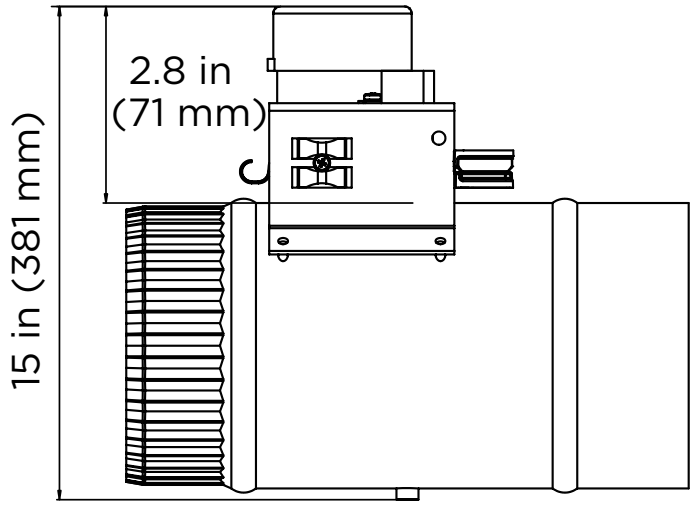


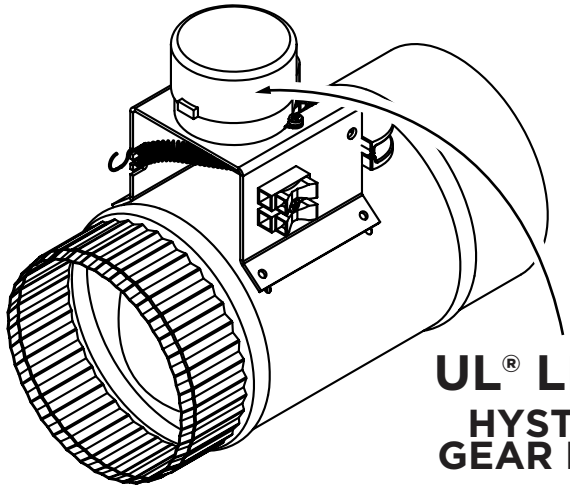

2 WIRE
UL® LISTED
HYSTERESIS GEAR MOTOR

INCLUDED

UL® Listed Stud-Mount Transformer



Unit Weight: 14 oz


Dimensions:
2.25 in L × 2 in W × 2.5 in H

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

Mounting Hardware Included: (6) #6 Sheet metal screws

MODEL: ZO212S

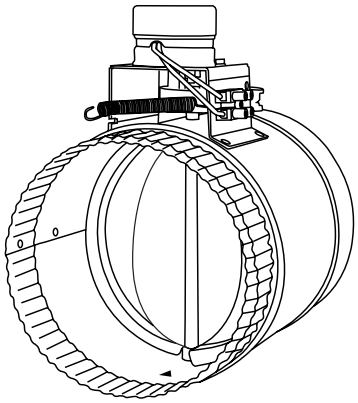

Model: ZO212S

12” ZoneMaster™ Motorized Damper - Normally Open, Adjustable

6 Running Watts, 0.25 Amps, 24 VAC, 60 Hz

UL® Listed Stud-Mount Transformer:

Input: 120 VAC, 60 Hz

Output: 24 VAC, 60 Hz, 15 VA

2 Wire Hysteresis Gear Motor

Adjustable Coupler with Set Points from 0–90 Degrees

U.S. Patents 11,808,479 and 12,516,845

Free-Wheeling Coupling for Long Life

12” Diameter

24 GA Galvanized Steel Housing

20 GA Galvanized Steel Blade

Meets Build America, Buy America Act (BABA) Requirements for U.S. Government-Funded Projects

3-Year Limited Warranty

Primary UOM: EA

Shipping Multiple: 2

MODEL	UNIT WEIGHT	VAC	WATTS	AMPS	HZ
ZO212S	4.56 lbs.	24	6	0.25	60

PERFORMANCE:

The ZoneMaster™ Motorized Damper saves money on heating and cooling by controlling temperatures in individual rooms.

PACKAGING METRICS:

	UPC / SCC	Width (in)	Height (in)	Depth (in)	Weight (lbs)
Unit (1 qty):	066028022905	8.75	13.75	12.625	6.00
Master Case (2 qty):	40066028022903	13.25	14.50	17.50	14.00

CUSTOMS TARIFF CLASSIFICATION:

HS Code	Country of Origin	USMCA Origin Criterion
8414599080	USA	B

HAZARDOUS MATERIAL INFO:

Not Applicable

MODEL: ZO212S