

ERV for balanced ventilation in multi-family homes

The FIT residential ERVs (energy recovery ventilators) improve indoor air quality (IAQ) and help lower the project's HERS score.

- **Energy Recovery Ventilator (ERV)**
- Airflow up to 129 cfm @ 0.4" w.g
- 4" duct connection (FIT 80E, FIT 80E-D)
- 5" duct connection (all FIT 120E models)
- Compact light-weight design with 10" installed depth
- Energy-efficient crossflow core with SRE up to 77% (0C/32F)
- Optional MERV8 or MERV13 replacement filters
- Mechanical shut-off damper (-D version of select FIT 120E models)
- ENERGY STAR Certified (-EC version of select FIT 120E models)
- Streamline installation with mirrored versions for mirrored floor plans (-M version)
- Hardwired (hard-connect) for direct connection to the home electrical mains (-HC version)
- Certifications: CSA, HVI, ENERGY STAR® (FIT 120E-D-EC only)
- Limited warranty (7 years on motors, 5 years on parts and core)

[Find more details in our online catalogue](#)

Performances

	Supply temperature	Net airflow	Consumed power	Sensible recovery efficiency	Adjustable sensible recovery efficiency	Latent recovery/moisture transfer
	°F(°C)	cfm (L/s)	W	%	%	%
Heat input	32 (0)	51 (24)	23	77	80	74
	32 (0)	70 (33)	28	71	74	70
	32 (0)	125 (59)	62	64	67	61
	-13 (-25)	51 (24)	24	61	62	53
	Supply temperature	Net airflow	Consumed power	Total recovery efficiency	Adjusted total recovery efficiency	Latent recovery/moisture transfer
	°F(°C)	cfm (L/s)	W	%	%	%
Cooling	95 (35)	51 (24)	46	70	72	70

Technical parameters

Product		
Voltage (nominal)	120	V
Phases	1~	
Input power	74	W
Input current	2.3	A
Air flow	129	cfm
Certificate	CSA, HVI, ENERGY STAR	
Exchanger		
Heat exchanger	Energy recovery	
Dimensions and weights		
Weight	35.3	lb
Used for		
Installation type	Ceiling; False ceiling	


Dimensions

A	B	C	D	E	F	Duct size
23 5/32 (588)	20 3/4 (527)	25 1/16 (636)	20 27/32 (529)	10 (254)	9 1/4 (235)	5 (125)
Dimensions in inches (mm).						


⚠ Recommended low airflow is outside valid range

⚠ Recommended high airflow is outside valid range

Supply - Performance curve

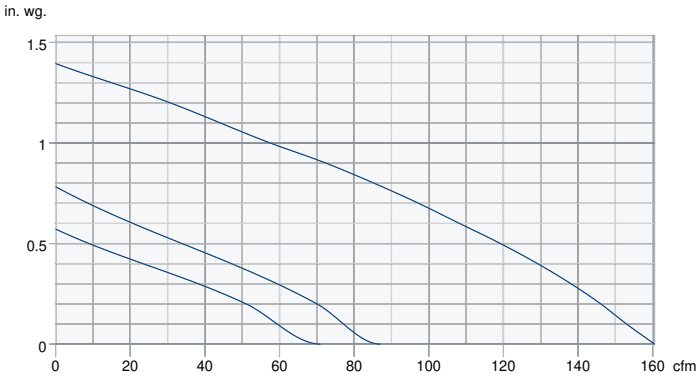

Extract - Performance curve

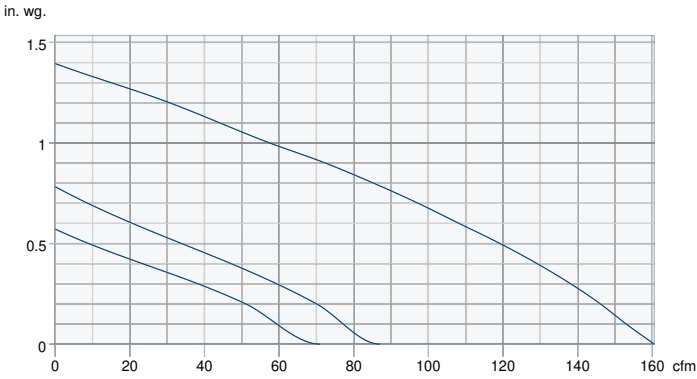

Unit	Supply	Extract
Air density	0.075 lb/ft³	

Accessories

ECO-Feel ® Auto IAQ control (414729)	FIDT 5 Insulated Flex Duct (411062)
MATRIX 6", 2 in 1 Vent Hood (413640)	MGE 5 Metal Exhaust Grill (411370)
MGS 5 Metal Supply Grill (411369)	RTS2 Push-button timer (40164)
RTS5 Push-button timer (44794)	EDF3 Electronic control (415515)
Filter,MERV13,Xflow,FIT120E (461675)	Filter,MERV8,Xflow,FIT120E (461674)
RTS4 Push-button timer (415516)	

Documents

E1993_FIT_SERIES_BROCHURE_EN.PDF
E1994_FAA_SELECTION_RESIDENTIAL.PDF
E2014_FILTERS__1__.PDF
445657_IOM_FIT_EN.PDF
465954 Fit 120E-D-EC-M-HC Spec Sheet
465960 FIT 120E-D-EC-M-HC Submittal Sheet
E400098__FIT_120E-D-M_-__120E-D-EC-M_DIMENSIONAL_SUBMITTAL.PDF
CSI_SPEC_FIT_120E_SERIES_-_ERV.ZIP